
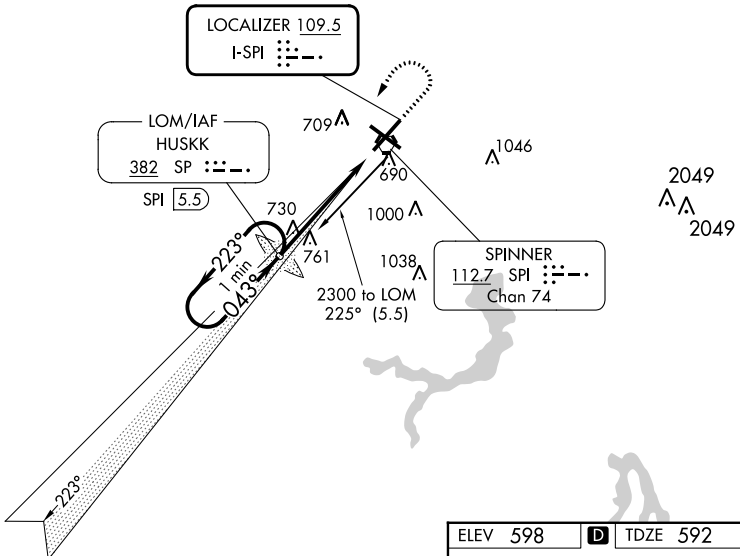


LOC I-SPI <b>109.5</b>	APP CRS <b>043°</b>	Rwy Idg TDZE Apt Elev	<b>7927</b> <b>592</b> <b>598</b>
---------------------------	------------------------	-----------------------------	---

# ILS or LOC RWY 4



ABRAHAM LINCOLN CAPITAL (SPI)

ADF Required.		SPRINGFIELD TOWER ★		GND CON	CLNC DEL	UNICOM
<p>⚠ When local altimeter setting not received, use Lincoln altimeter setting and increase all DA 57 feet, all MDA 60 feet, increase S-LOC and Circling Cat C/D visibility ¼ mile. For inop ALS when using Lincoln altimeter setting, increase S-LOC 4 Cats C and D visibility to 1¾ SM. ASR *RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Lincoln altimeter setting).</p>		<b>121.3 (CTAF) 257.8</b>		<b>121.9 348.6</b>	<b>121.7</b>	<b>122.95</b>
ATIS	SAINT LOUIS APP CON ★					
<b>127.65 270.1</b>	<b>126.15 323.0</b>					



EC-3, 28 NOV 2024 to 26 DEC 2024

EC-3, 28 NOV 2024 to 26 DEC 2024

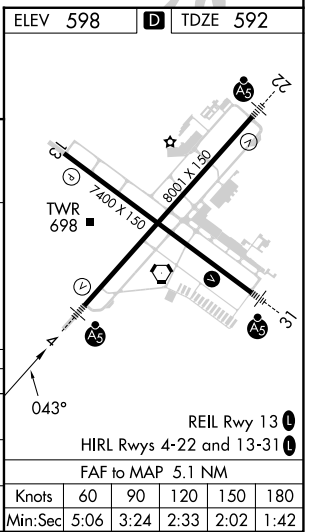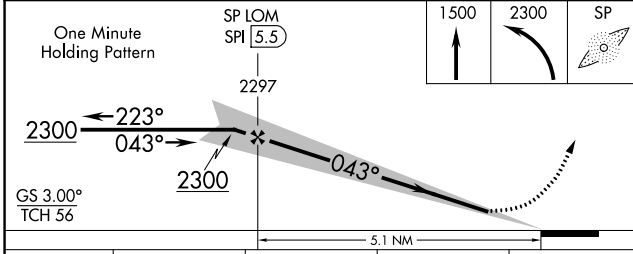

CATEGORY	A	B	C	D
S-ILS 4		* 792/24 200 (200-½)		
S-LOC 4	1020/24	428 (500-½)	1020/40	428 (500-¾)
CIRCLING	1040-1 442 (500-1)	1100-1 502 (600-1)	1360-2¼ 762 (800-2¼)	1380-2½ 782 (800-2½)

ELEV 598	TDZE 592
Knots	60 90 120 150 180
Min:Sec	5:06 3:24 2:33 2:02 1:42