




WAAS CH 86830 W02B	APP CRS 015°	Rwy Idg TDZE Apt Elev	7571 754 759
----------------------------------------	------------------------	-----------------------------	-----------------------------------------

RNAV (GPS) RWY 2L

DUPAGE (DPA)

RNP APCH - GPS.	MALSRL 	MISSED APPROACH: Climb to 1300 then climbing left turn to 3000 direct HINCK and hold.
 Circling Rwy 15, 28, 33 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV Cats C/D visibility to 1 3/8 SM.		

ATIS 132.075	CHICAGO APP CON 133.5 349.0	DUPAGE TOWER 120.9 257.8	GND CON 121.8	CLNC DEL 119.75
------------------------	---------------------------------------	------------------------------------	-------------------------	---------------------------

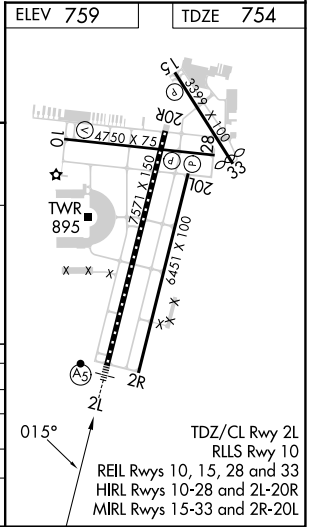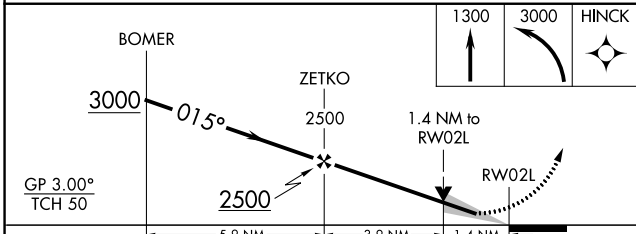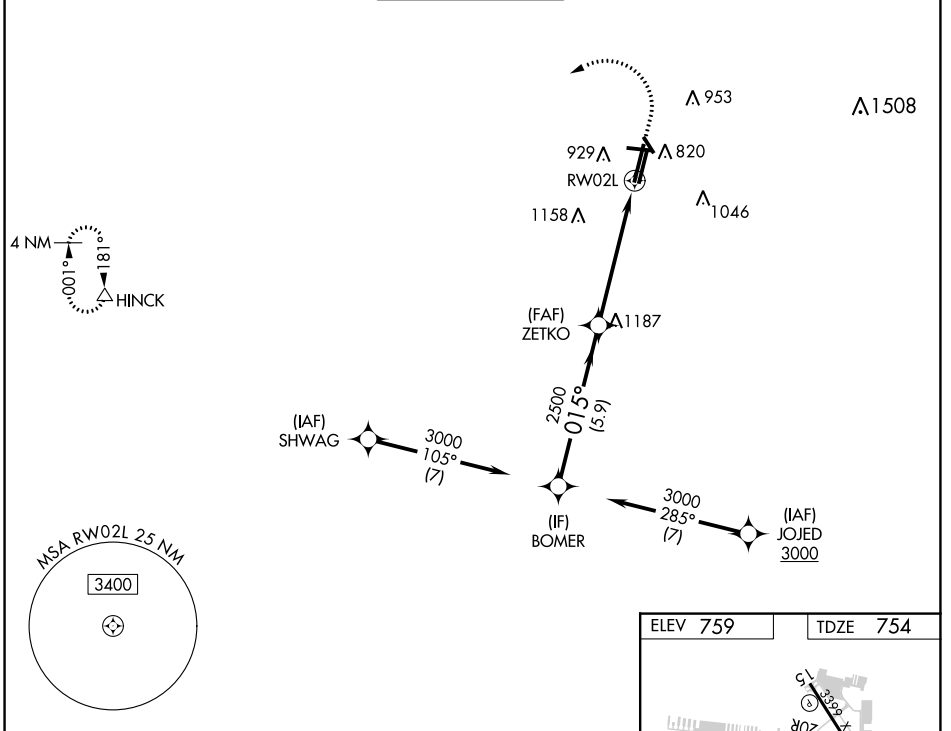

CATEGORY	A	B	C	D
LPV DA		954/18	200 (200-1/2)	
LNAV/VNAV DA		1214/45	460 (500-7/8)	
LNAV MDA	1260/24	506 (600-1/2)	1260/55	506 (600-1)
CIRCLING	1260-1 501 (600-1)	1360-1 601 (700-1)	1460-2 701 (800-2)	1460-2 1/4 701 (800-2 1/4)

EC-3, 28 NOV 2024 to 26 DEC 2024

EC-3, 28 NOV 2024 to 26 DEC 2024