| LOC/DME I-OCW | APP CRS | Rwy Idg | 5000 |
|---|---|---|---|
| 110.9 | 045° | TDZE | 35 |
| Chan 46 | | Apt Elev | 37 |

# LOC RWY 5

## WASHINGTON-WARREN (OCW)

ADF required.

Circling Rwy 17 NA at night. When local altimeter setting not received, use Greenville altimeter setting and increase all MDAs 60 feet.
Rwy 5 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 1000, then climbing right turn to 1600 direct RNW NDB and hold.

| AWOS-3 | CHERRY POINT APP CON | UNICOM |
|---|---|---|
| 120.175 | 119.35 377.175 | 122.7 (CTAF) L |

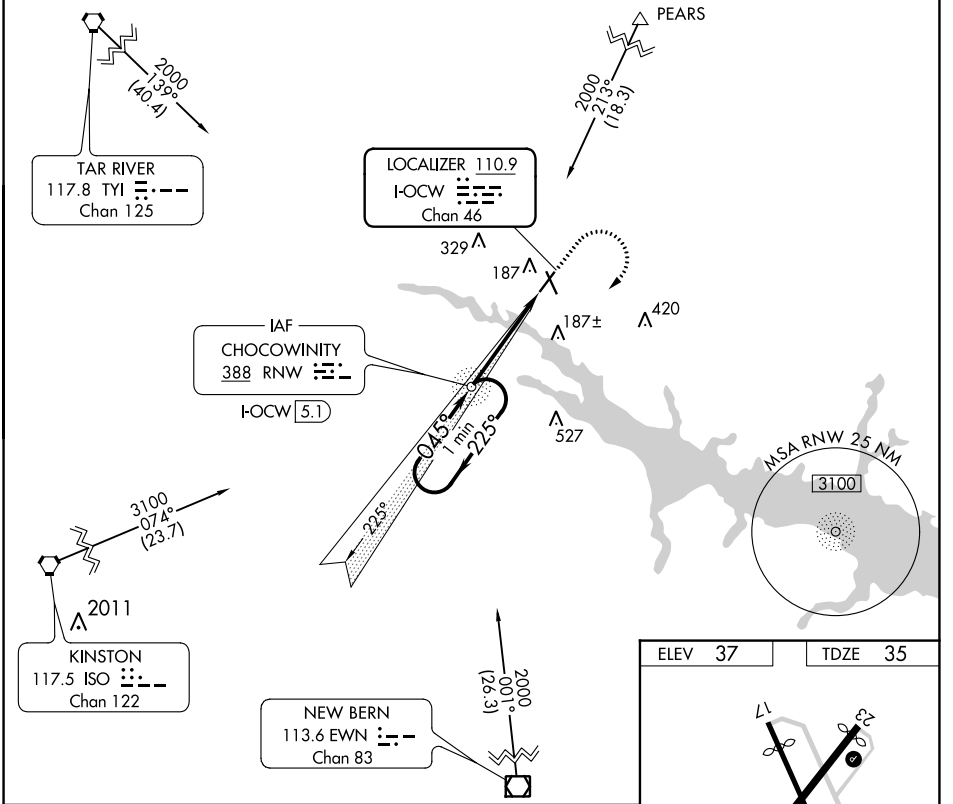


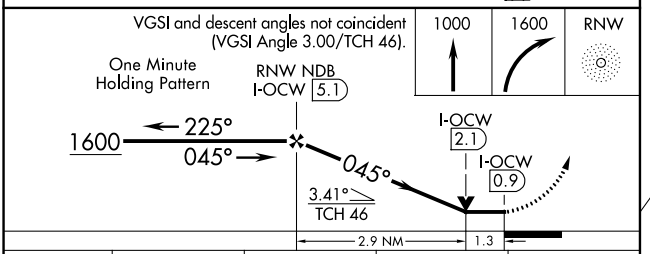


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-5 | 480-1 | 445 (500-1) | 480-1⅜ | 445 (500-1⅜) |
| CIRCLING | 540-1 | 503 (600-1) | 640-1¾ | 780-2½ |
| | | | 603 (700-1¾) | 743 (800-2½) |

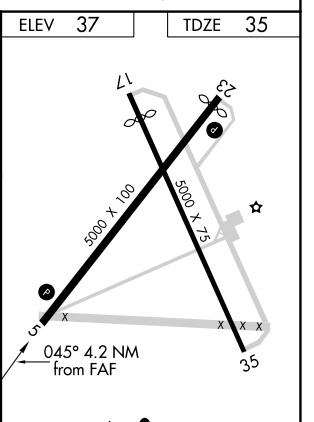


REIL Rwy 5 and 23 L
MIRL Rwys 5-23 L

FAF to MAP 4.2 NM

| Knots | 60 | 90 | 120 | 150 | 180 |
|---|---|---|---|---|---|
| Min:Sec | 4:12 | 2:48 | 2:06 | 1:41 | 1:24 |



SE-2, 28 NOV 2024 to 26 DEC 2024
SE-2, 28 NOV 2024 to 26 DEC 2024