

WAAS CH <b>86503</b> <b>W09A</b>	APP CRS <b>090°</b>	Rwy Idg TDZE Apt Elev	<b>6500</b> <b>16</b> <b>17</b>
--	------------------------	-----------------------------	---------------------------------------

# RNAV (GPS) RWY 9



GULF SHORES INTL/JACK EDWARDS FLD (JKA)

RNP APCH - GPS.

▼ Baro-VNAV and VDP NA when using Pensacola Intl altimeter setting. Rwy 09 helicopter visibility reduction below 3/4 SM NA. Circling Rwy 17, 35 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Pensacola Intl altimeter setting and increase LPV DA to 388 feet and all visibilities 1/2 SM. Increase LNAV/VNAV DA to 394 feet and all visibilities 1/2 SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D 1/4 SM, and Circling visibility Cat C/D 1/4 SM.


MISSED APPROACH:  
Climb to 2500 direct  
WARLY and hold.

ATIS <b>134.525</b>	PENSACOLA APP CON <b>120.65 270.8</b>	GULF SHORES TOWER ★ <b>118.65</b> (CTAF) <b>0</b>	CLNC DEL <b>121.7</b>	CLNC DEL <b>124.55</b> (When twr clsd)	GND CON <b>121.7</b>	UNICOM <b>122.7</b>
------------------------	--	--	--------------------------	---	-------------------------	------------------------

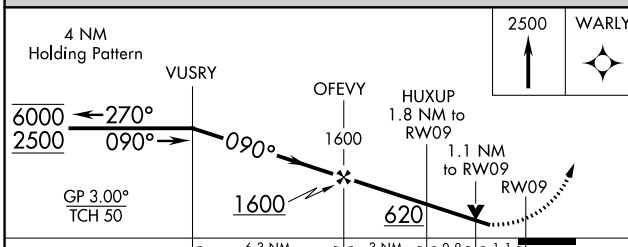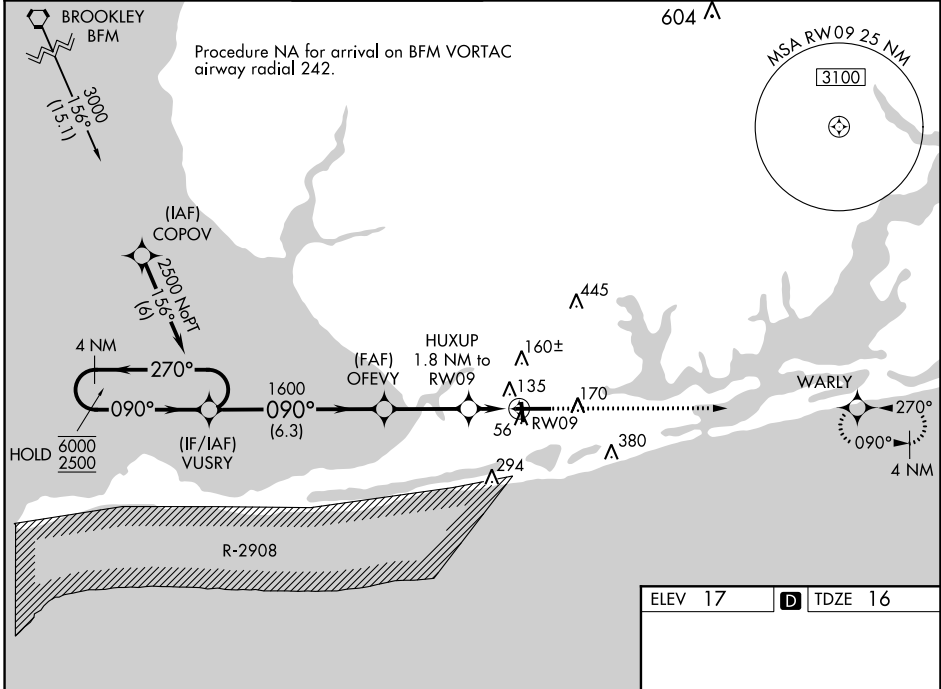

ELEV 17	TDZE 16
---------	---------

CATEGORY	A	B	C	D
LPV DA		310-7/8	294 (300-7/8)	
LNAV/VNAV DA		316-7/8	300 (300-7/8)	
LNAV MDA	400-1	384 (400-1)	400-1 1/8	384 (400-1 1/8)
CIRCLING	480-1	463 (500-1)	740-2 723 (800-2)	740-2 1/4 723 (800-2 1/4)

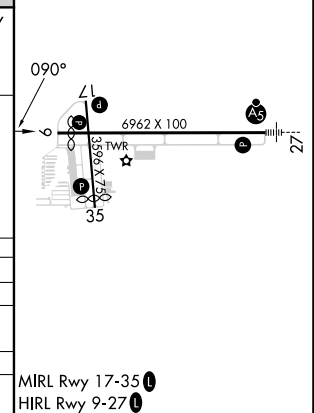

SE-4, 28 NOV 2024 to 26 DEC 2024

SE-4, 28 NOV 2024 to 26 DEC 2024