


| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 70710 W09A | APP CRS 092° | Rwy Idg TDZE Apt Elev | 6502 147 147 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 9


FLORENCE RGNL (FLO)

| | | | | | |
|---|--|-------|---|--|--|
| RNP APCH - GPS. | | MALSR | MISSED APPROACH: Climb to 2000 direct ESVAC and hold. | | |
| For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Circling Rwy 1, 19 NA at night. | | | | | |


| | | | | | |
|------------------------|---|--|--------------------------------|---------------------------------|-------------------------|
| ATIS 123.625 | FLORENCE APP CON★ 118.6 341.7 (256°-074°) 135.25 316.15 (075°-255°) | FLORENCE TOWER★ 125.1 (CTAF) 0 353.85 | GND CON 121.9 353.85 | CLNC DEL 121.9 353.85 | UNICOM 122.95 |
|------------------------|---|--|--------------------------------|---------------------------------|-------------------------|

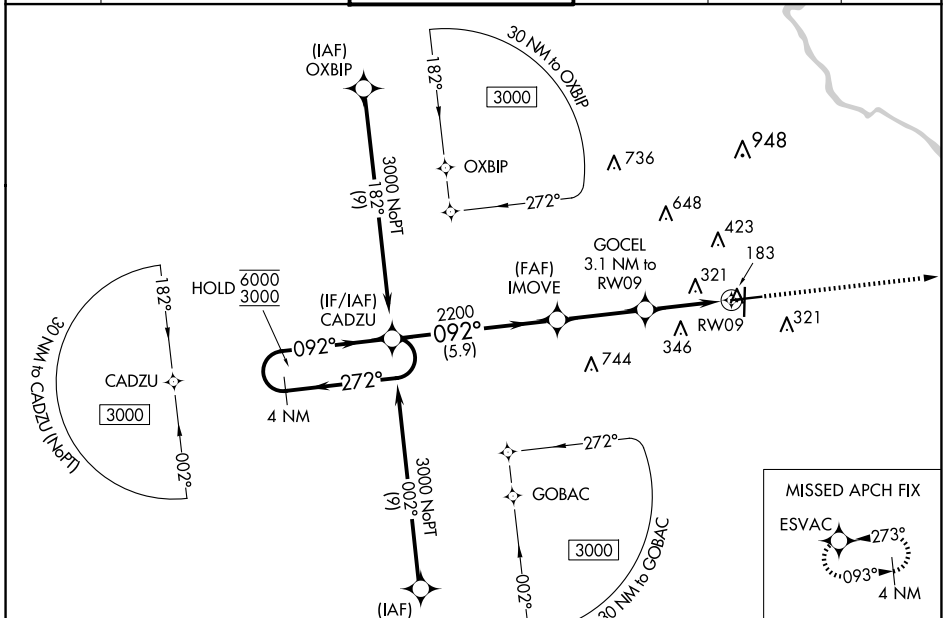

| | |
|----------|----------|
| ELEV 147 | TDZE 147 |
|----------|----------|

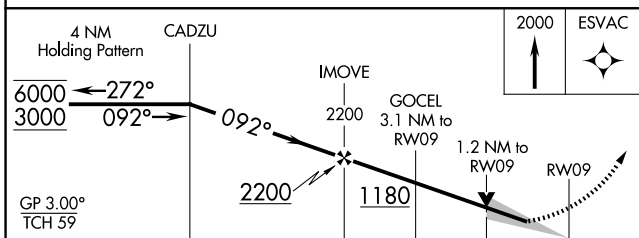

| CATEGORY | A | B | C | D |
|--------------|----------------------|----------------------|------------------------------|------------------------------|
| LPV DA | | 347-1/2 | 200 (200-1/2) | |
| LNAV/VNAV DA | | 603-7/8 | 456 (500-7/8) | |
| LNAV MDA | 580-1/2 | 433 (500-1/2) | 580-3/4 | 433 (500-3/4) |
| CIRCLING | 640-1 493 (500-1) | 660-1 513 (600-1) | 900-2 1/4 753 (800-2 1/4) | 900-2 1/2 753 (800-2 1/2) |

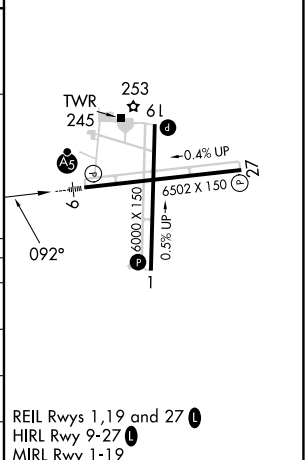

SE-2, 23 JAN 2025 to 20 FEB 2025

SE-2, 23 JAN 2025 to 20 FEB 2025