

|                           |                        |                             |   |
|---------------------------|------------------------|-----------------------------|---|
| LOC I-MSS<br><b>108.7</b> | APP CRS<br><b>045°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5601</b><br><b>205</b><br><b>221</b> |
|---------------------------|------------------------|-----------------------------|---|

# ILS or LOC RWY 5


MASSENA INTL-RICHARDS FLD (MSS)

ADF required. ADF and RADAR required for procedure entry.

**NA** Circling Rwy 9, 23, 27 NA at night. When local altimeter setting not received, use Potsdam altimeter setting and increase DA to 528 feet and all visibilities ¼ SM; increase all MDAs 80 feet, visibility Cat C and D ½ SM and Circling visibility Cat C and Cat D ¼ SM.


**MISSED APPROACH:**  
Climb to 1200 then climbing left turn to 2300 direct MISSE LOM and hold.

|                        |                                      |                                 |
|------------------------|--------------------------------------|---------------------------------|
| ASOS<br><b>128.075</b> | BOSTON CENTER<br><b>135.25 377.1</b> | UNICOM<br><b>123.0 (CTAF) 0</b> |
|------------------------|--------------------------------------|---------------------------------|

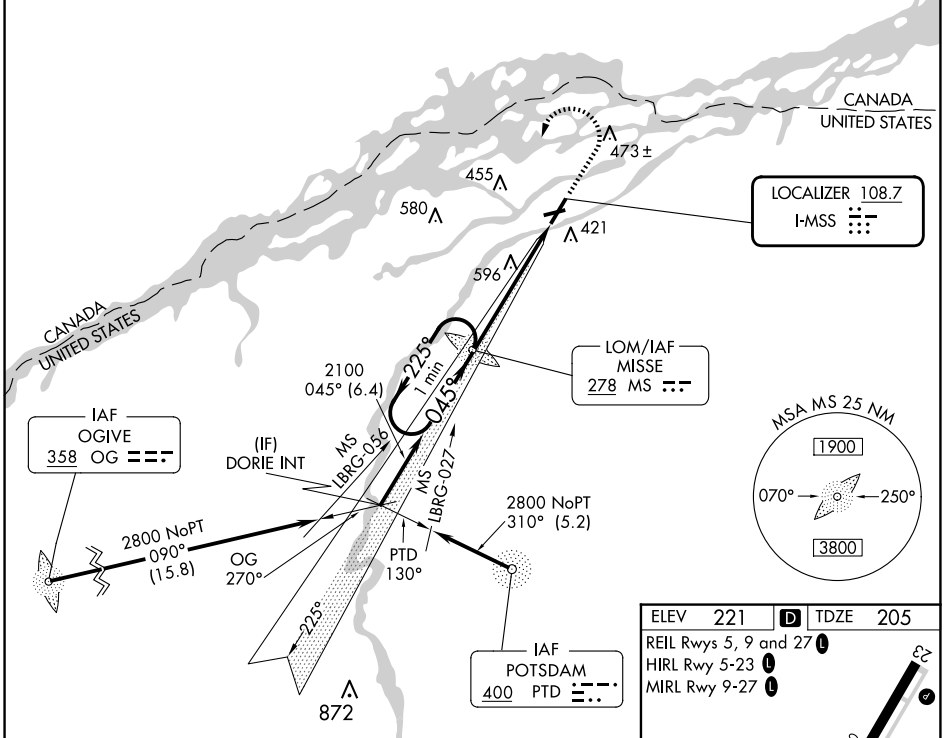


**LOCALIZER 108.7**  
I-MSS

LOM/IAF MISSE  
**278 MS**



IAF OGIVE  
358 OG ---

IAF POTSDAM  
400 PTD ---

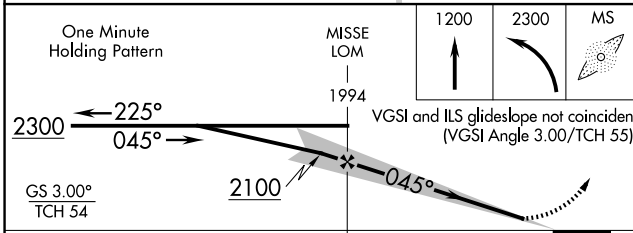

|                       |          |
|-----------------------|----------|
| ELEV 221              | TDZE 205 |
| REIL Rwys 5, 9 and 27 |          |
| HIRL Rwy 5-23         |          |
| MIRL Rwy 9-27         |          |

|                                       |
|---------------------------------------|
| FAF to MAP 5.4 NM                     |
| Knots: 60, 90, 120, 150, 180          |
| Min:Sec: 5:24, 3:36, 2:42, 2:10, 1:48 |

| CATEGORY | A     | B           | C            | D            |
|----------|-------|-------------|--------------|--------------|
| S-ILS 5  |       | 455-¾       | 250 (300-¾)  |              |
| S-LOC 5  | 800-1 | 595 (600-1) | 800-1¾       | 595 (600-1¾) |
| CIRCLING | 800-1 | 579 (600-1) | 880-1¾       | 900-2¼       |
|          |       |             | 659 (700-1¾) | 679 (700-2¼) |

NE-2, 23 JAN 2025 to 20 FEB 2025

NE-2, 23 JAN 2025 to 20 FEB 2025