


WAAS CH <b>99341</b> <b>W21A</b>	APP CRS <b>214°</b>	Rwy Idg TDZE Apt Elev	<b>7000</b> <b>7003</b> <b>7014</b>
----------------------------------------	------------------------	-----------------------------	-------------------------------------------

# RNAV (GPS) RWY 21

FLAGSTAFF PULLIAM (F.L.G)

<p><b>▼</b> For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19 °C (2°F) or above 44°C (111°F). DME/DME RNP-0.3 NA. <b>▲</b> For inop ALS, increase LPV all Cats visibility to 3/8 SM.</p>	<p>MALSR</p>	<p>MISSED APPROACH: Climb to 7500 then climbing left turn to 10800 direct HOXOL and hold.</p>
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------	-----------------------------------------------------------------------------------------------


ATIS <b>125.8</b>	PHOENIX APP CON <b>126.375 236.775</b>	FLAGSTAFF TOWER ★ <b>134.55 (CTAF) 239.25</b>	GND CON <b>121.9</b>	UNICOM <b>122.95</b>
----------------------	-------------------------------------------	--------------------------------------------------	-------------------------	-------------------------

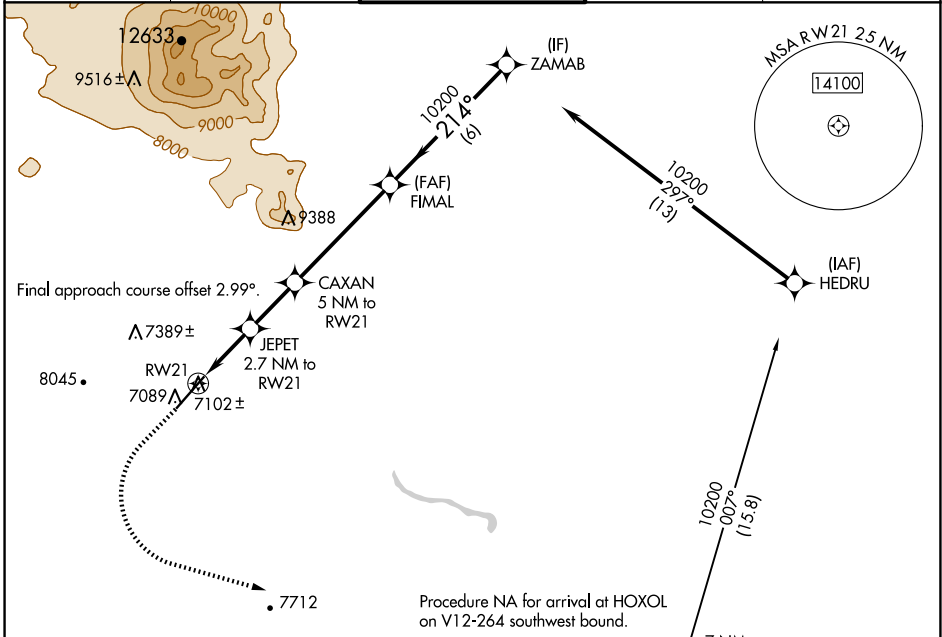

SW-4, 23 JAN 2025 to 20 FEB 2025

SW-4, 23 JAN 2025 to 20 FEB 2025

ELEV 7014	<b>D</b>	TDZE 7003
-----------	----------	-----------

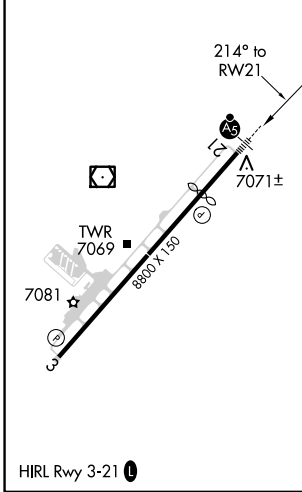

	7500	10800	HOXOL		FIMAL	ZAMAB
	↑	↶	△		10200	10200
	*LNAV only		JEPET 2.7 NM to RWY 21	CAXAN 5 NM to RWY 21		
		*1 NM to RWY 21			214°	10200
				7900*	8640*	GP 3.00° TCH 52
		1 NM	1.7 NM	2.3 NM	4.9 NM	6 NM
CATEGORY	A		B		C	D
LPV DA	7258-1/2		255 (300-1/2)			
LNAV/VNAV DA	7319-5/8		316 (400-3/4)			
LNAV MDA	7360-1/2		357 (400-1/2)		7360-5/8 357 (400-3/4)	
<b>C</b> CIRCLING	7520-1 506 (600-1)	7560-1 546 (600-1)	8100-3 1086 (1100-3)		8560-3 1546 (1600-3)	