



APP CRS 354°	Rwy Idg TDZE Apt Elev	6500 544 544
------------------------	-----------------------------	---



RNAV (GPS) RWY 35

ST LOUIS RGNL (ALN)

RNP APCH.				MISSED APPROACH: Climb to 2200 direct JETIK and hold.	
<p>▼ Visibility reduction by helicopters NA. When local altimeter setting not received, use St Louis Lambert Infil altimeter setting and increase all MDA 60 feet, increase LNAV Cat C/ D visibility 1/8 SM and Circling Cat C/D visibility 1/4 SM. When VGSi inop, straight-in/ Circling Rwy 35 procedure and Circling Rwy 17 NA at night.</p>					
ATIS 128.0	ST LOUIS APP CON 124.2 353.9	REGIONAL TOWER* 126.0 (CTAF) 0 239.0	GND CON 120.2	CLNC DEL 120.2 (when tower closed)	UNICOM 122.95

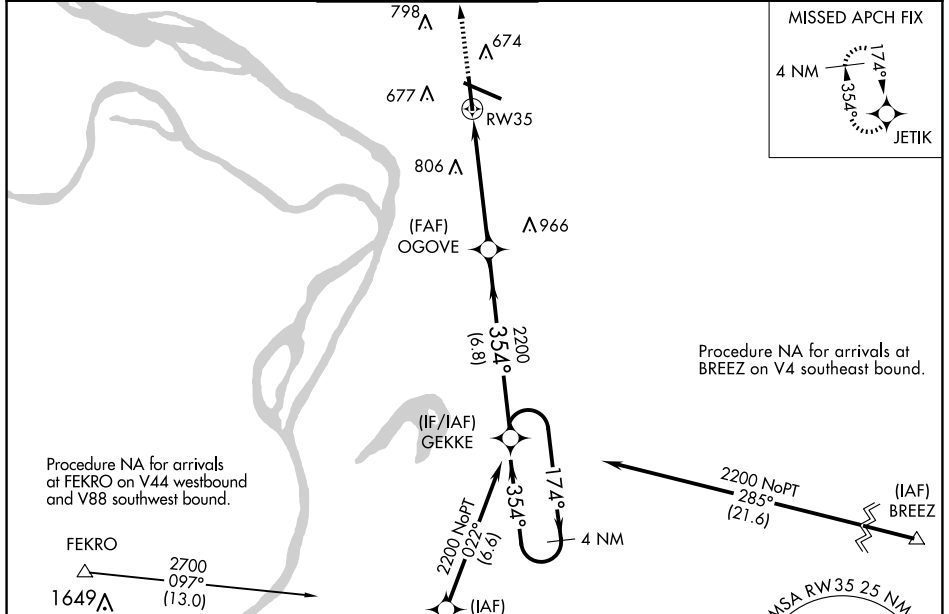

ELEV 544	D	TDZE 544
----------	----------	----------

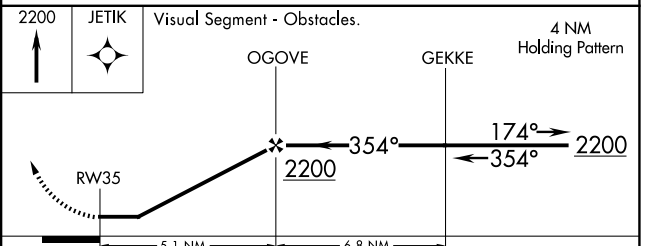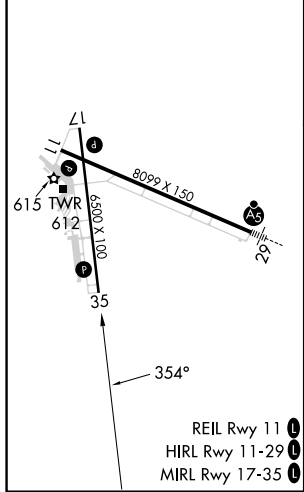

CATEGORY	A	B	C	D
LNAV MDA	1020-1	476 (500-1)	1020-1 3/8	476 (500-1 3/8)
CIRCLING	1020-1	476 (500-1)	1160-1 3/4	1200-2
			616 (700-1 3/4)	656 (600-2)

EC-3, 23 JAN 2025 to 20 FEB 2025

EC-3, 23 JAN 2025 to 20 FEB 2025