

WAAS CH 86248 W28A	APP CRS 282°	Rwy Idg TDZE Apt Elev	3900 2242 2250
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 28


STANLEY MUNI (Ø8D)

RNP APCH - GPS.



⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Rwy 28 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 5000 direct EWXUR and hold, continue climb-in-hold to 5000.

AWOS-3 121.1	MINNEAPOLIS CENTER 127.6 279.6	CTAF 122.9
------------------------	--	----------------------

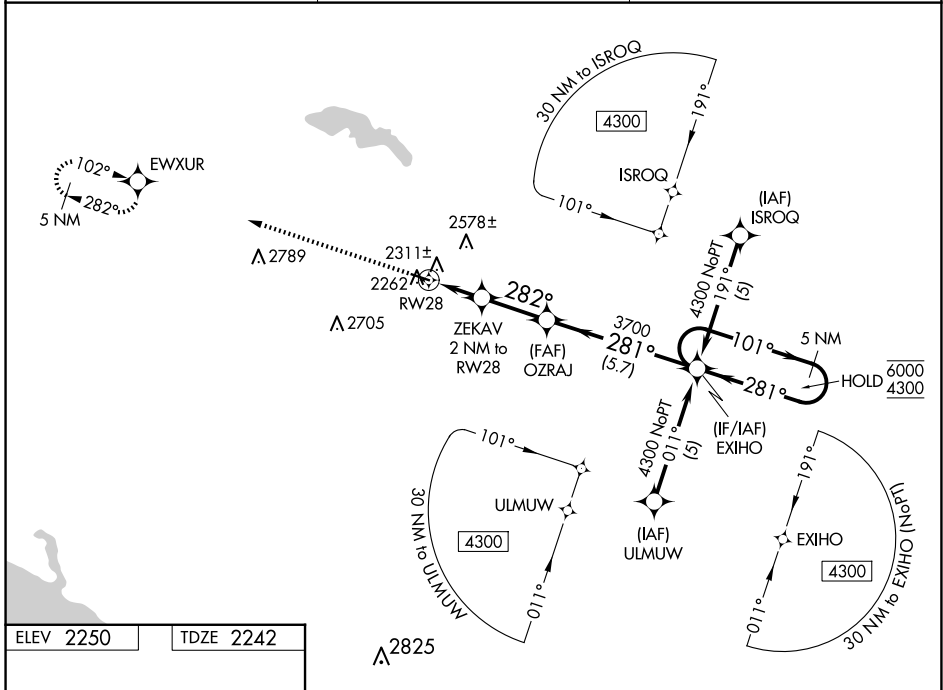

ELEV 2250	TDZE 2242
-----------	-----------

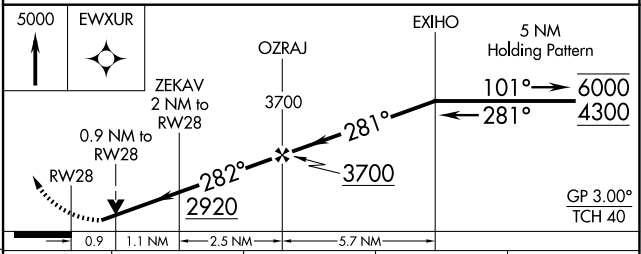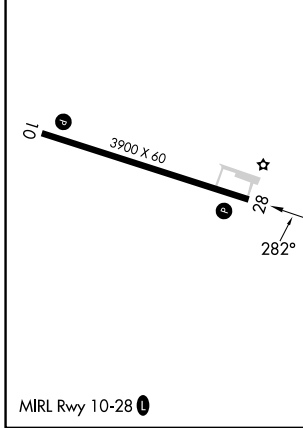

	GP 3.00° TCH 40	5 NM Holding Pattern			
		6000	4300		
		101° →	← 281°		
CATEGORY	A	B	C	D	
LPV DA	2492-1	250 (300-1)		NA	
LNAV/VNAV DA	2492-1	250 (300-1)		NA	
LNAV MDA	2580-1	338 (400-1)		NA	
CIRCLING	2720-1	2940-1	690 (700-1)	NA	
	470 (500-1)				