

WAAS CH 82319 W31A	APP CRS 310°	Rwy Idg TDZE Apt Elev	7901 3601 3607
--	------------------------	-----------------------------	---



RNAV (GPS) Y RWY 31

RICK HUSBAND AMARILLO INTL (AMA)

ASR **▼** DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 46°C (116°F). When local altimeter setting not received, use Borger altimeter setting; increase DA to 4004 and all visibilities 5/8 mile; increase all MDA 160 feet and visibility Cat C and D 1/2 mile. Baro-VNAV and VDP NA when using Borger altimeter setting.

MISSED APPROACH: Climb to 6100 direct MOVEO and on track 317° to LANIT and hold.

ATIS 118.85 350.3	AMARILLO APP CON* 119.5 307.0	AMARILLO TOWER* 118.3 (CTAF) 257.9	GND CON 121.9 348.6	CLNC DEL 121.65 239.275	UNICOM 122.95
-----------------------------	---	--	-------------------------------	-----------------------------------	-------------------------

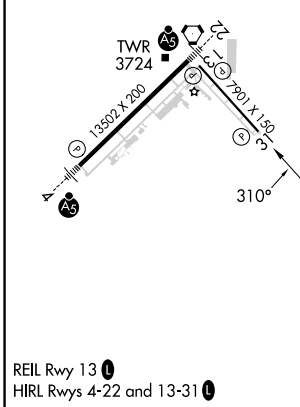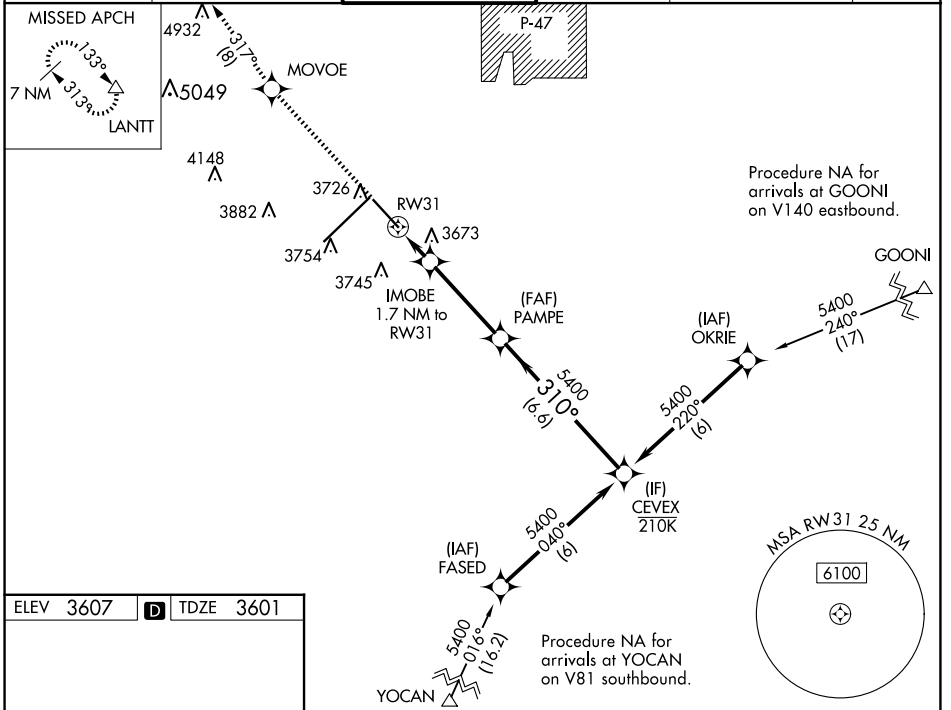

ELEV 3607	D	TDZE 3601	
6100	MOVEO	tr 317°	LANIT
*LNAV only.			
RW31		IMOBE 1.7 NM to RW31	PAMPE 5400
*0.9 NM to RW31		*4180	CEVEK 5400
0.9		0.8	3.7 NM
A		B	C
LPV DA	3851-3/4		250 (300-3/4)
LNAV/VNAV DA	3851-3/4		250 (300-3/4)
LNAV MDA	3940-1 339 (400-1)		
C CIRCLING	4080-1	473 (500-1)	4240-1 3/4 633 (700-1 3/4) 4280-2 1/4 673 (700-2 1/4)

SC-2, 20 MAR 2025 to 17 APR 2025

SC-2, 20 MAR 2025 to 17 APR 2025