

| | | |
|--|------------------------|--|
| WAAS CH 82718 W04A | APP CRS 038° | Rwy Idg 13502 TDZE 3607 Apt Elev 3607 |
|--|------------------------|--|

RNAV (GPS) Y RWY 4

RICK HUSBAND AMARILLO INTL (AMA)



RNP APCH.

ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, and LNAV/VNAV and LNAV Cat E to 1¼ SM.
****RVR 1800 authorized with use of FD or AP or HUD to DA.**




MISSED APPROACH: Climb to 5400 direct CIPLI and on track 053° to ZUKTA and hold.

| | | | | | |
|-----------------------------|---|--|-------------------------------|-----------------------------------|-------------------------|
| ATIS 118.85 350.3 | AMARILLO APP CON* 119.5 307.0 | AMARILLO TOWER* 118.3 (CTAF) 257.9 | GND CON 121.9 348.6 | CLNC DEL 121.65 239.275 | UNICOM 122.95 |
|-----------------------------|---|--|-------------------------------|-----------------------------------|-------------------------|

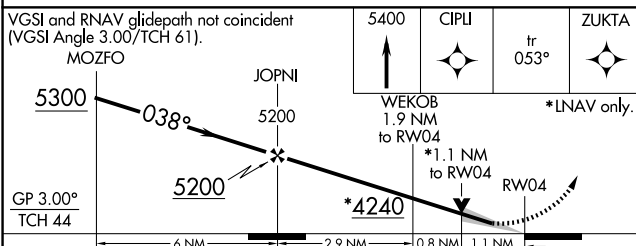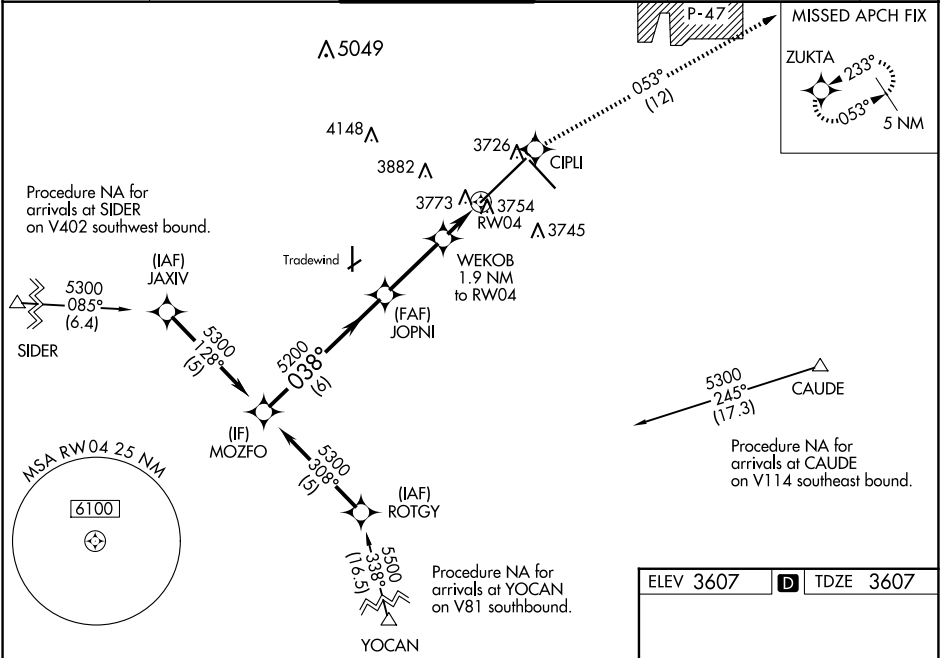

| | |
|-----------|--------------------|
| ELEV 3607 | D TDZE 3607 |
|-----------|--------------------|

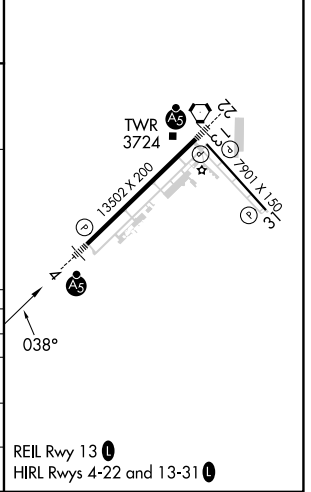

| | | | | | |
|--------------|---------|-------------|-------------------------|-------------------------|-----------------------|
| CATEGORY | A | B | C | D | E |
| LPV DA ** | 3807/24 | | 200 (200-½) | | |
| LNAV/VNAV DA | 4028/50 | | 421 (500-1) | | |
| LNAV MDA | 4040/24 | 433 (500-½) | 4040/40 433 (500-¾) | 4040/50 | 433 (500-1) |
| CIRCLING | 4080-1 | 473 (500-1) | 4240-1¾ 633 (700-1¾) | 4280-2¼ 673 (700-2¼) | 4460-3 853 (900-3) |

SC-2, 20 MAR 2025 to 17 APR 2025

SC-2, 20 MAR 2025 to 17 APR 2025