

WAAS CH 78318 W36A	APP CRS 001°	Rwy ldg 11602 TDZE 254 Apt Elev 254
--	------------------------	--

RNAV (GPS) RWY 36

ARKANSAS INTL (BYH)


▼

⚠ NA

Inop table does not apply. Baro-VNAV NA when using Blytheville Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 54°C (130°F). Circling NA east of Rwy 18-36. DME/DME RNP-0.3 NA. Obtain local altimeter setting on CTAF; when not received, use Blytheville Muni altimeter setting and increase all DA 14 feet and all MDA 20 feet. Increase LNAV/VNAV all Cats and LNAV Cat C/D visibility ½ mile.

MISSED APPROACH: Climb to 2500 direct CEDVA and hold.

MEMPHIS CENTER 134.65 316.15	UNICOM 122.7 (CTAF) 0
--	---------------------------------

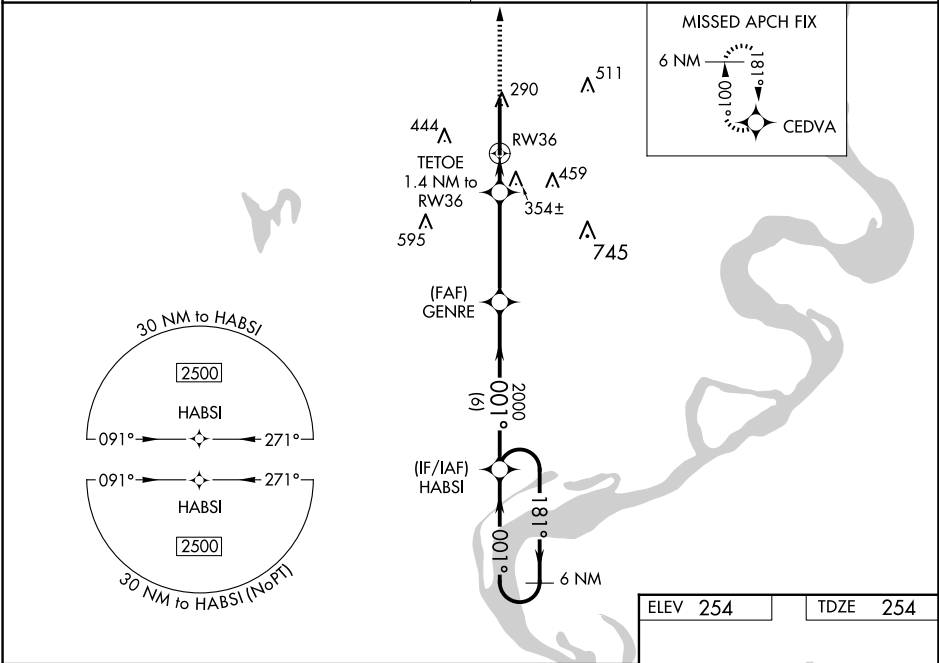

6 NM Holding Pattern

HABS

2500 ← 181°
001° →

GP 3.00°
TCH 51

2000

GENRE 2000

TETOE 1.4 NM to RW36

RW36

6 NM

3.9 NM

1.4 NM

2500 CEDVA

*LNAV only.

CATEGORY	A	B	C	D
LPV DA		454-¾	200 (200-¾)	
LNAV/VNAV DA		537-1	283 (300-1)	
LNAV MDA		620-1	366 (400-1)	
CIRCLING	700-1 446 (500-1)	720-1 466 (500-1)	800-1½ 546 (600-1½)	820-2 566 (600-2)

ELEV 254 TDZE 254

389 ☆

81

11602 X 150

36

001° to RW36

HIRL Rwy 18-36 0

SC-1, 20 MAR 2025 to 17 APR 2025

SC-1, 20 MAR 2025 to 17 APR 2025