

WAAS CH 50544 W32A	APP CRS 320°	Rwy Idg TDZE 2587 Apt Elev 2592	7301
--	------------------------	---	-------------

RNAV (GPS) RWY 32

DICKINSON/THEODORE ROOSEVELT RGNL (DIK)

RNP APCH - GPS.

▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cat C/D visibility to ⅔ SM.

MALSR

MISSED APPROACH: Climb to 4400 direct LEGRY and hold.

ASOS 118.375	MINNEAPOLIS CENTER 124.25 236.825	UNICOM 123.0 (CTAF) 0
------------------------	---	---------------------------------

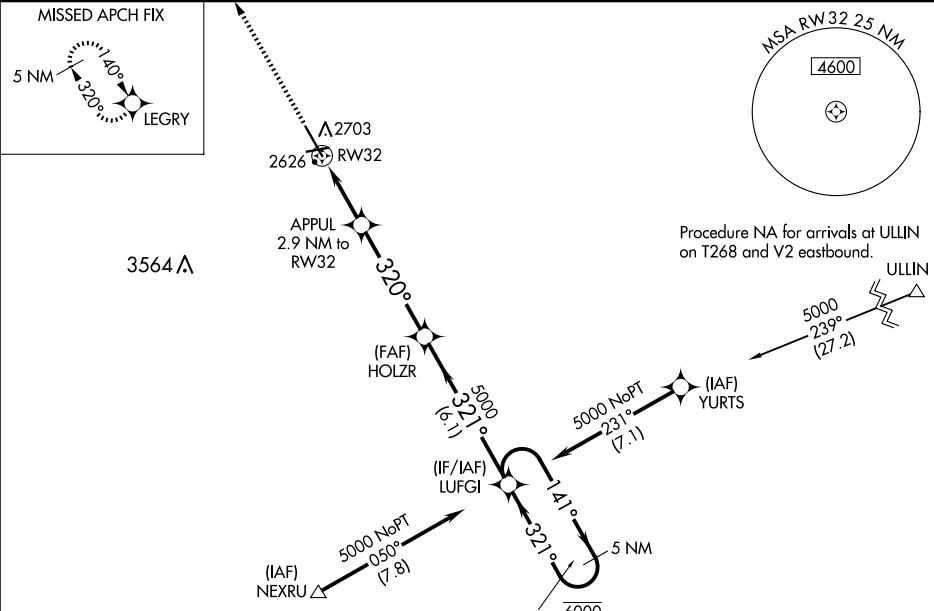

4400	LEGRY	HOLZR	LUFGI	5 NM Holding Pattern
0.8 NM to RW32	2.9 NM to RW32	5000	5000	6000/5000
0.8 NM	2.1 NM	4.6 NM	6.1 NM	GP 3.00° TCH 50
CATEGORY	A	B	C	D
LPV DA		2787-½	200 (200-½)	
LNAV/VNAV DA		2837-½	250 (300-½)	
LNAV MDA		2880-½	293 (300-½)	
CIRCLING	3060-1	468 (500-1)	3120-1½ 528 (600-1½)	3200-2 608 (700-2)

