RNAV (GPS) RWY 23

SMITH FLD (SMD)

WAAS CH 65738 W23A	APP CRS 236°	Rwy Idg 3035 TDZE 834 Apt Elev 836

RNP APCH.

T
NA
-22°C

Procedure NA at night. Rwy 23 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Fort Wayne Intl altimeter setting and increase all MDA 40 feet and LP and LNAV Cat C visibility ⅛ SM.

MISSED APPROACH: Climb to 2700 direct JISUD and on track 294° to WERBU and hold.

AWOS-3	FORT WAYNE APP CON	UNICOM
124.55	127.2 284.6	122.8 (CTAF) L

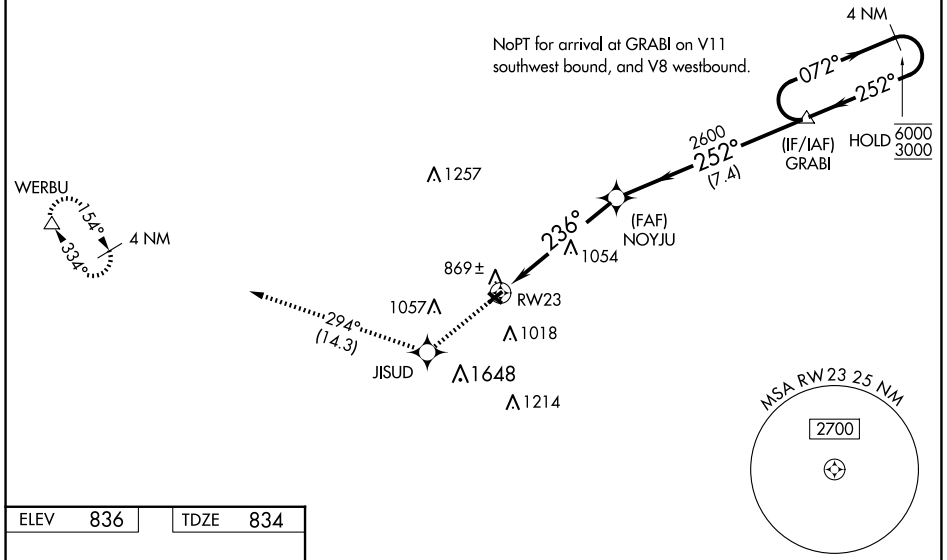

ELEV 836 TDZE 834



MIRL Rwys 5-23 and 13-31 L

2700	JISUD	tr 294°	WERBU

Visual Segment - Obstacles.

4 NM Holding Pattern

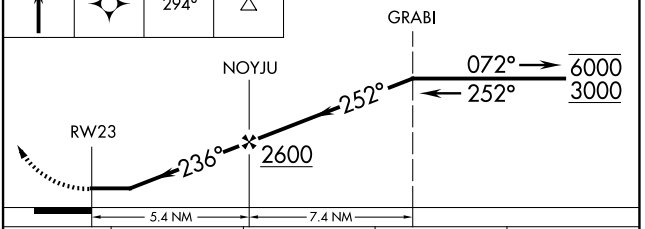

CATEGORY	A	B	C	D
LP MDA	1360-1	526 (600-1)	1360-1½ 526 (600-1½)	NA
LNAV MDA	1400-1	566 (600-1)	1400-1⅝ 566 (600-1⅝)	NA
C CIRCLING	1400-1	564 (600-1)	1940-3 1104 (1200-3)	NA

EC-2, 20 MAR 2025 to 17 APR 2025
EC-2, 20 MAR 2025 to 17 APR 2025