


| | | |
|---------------------------------|------------------------|---|
| WAAS CH 40313 W01B | APP CRS 006° | Rwy Idg 5930 TDZE 17 Apt Elev 36 |
|---------------------------------|------------------------|---|

RNAV (GPS) Z RWY 1L

NAPA COUNTY (APC)



RNP APCH-GPS.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. Inop table does not apply to LPV minimums. For inop ALS, increase visibility LNAV/VNAV to 7/5 SM. Missed approach requires minimum climb of 420 feet per NM to 2200. If unable to meet climb gradient see RNAV (GPS) Y RWY 1L.


MALS 

MISSED APPROACH: Climb to 5000 direct CIVDA and on track 326° to POPES and hold, continue climb-in-hold to 5000.

| | | | | | |
|-----------------------|--------------------------------------|---|-------------------------|---------------------------|-------------------------|
| ATIS 124.05 | OAKLAND CENTER 127.8 353.5 | NAPA TOWER ★ 118.7 (CTAF) 0 257.8 | GND CON 121.7 | CLNC DEL 127.85 | UNICOM 122.95 |
|-----------------------|--------------------------------------|---|-------------------------|---------------------------|-------------------------|

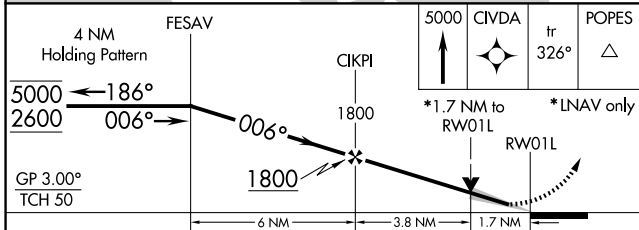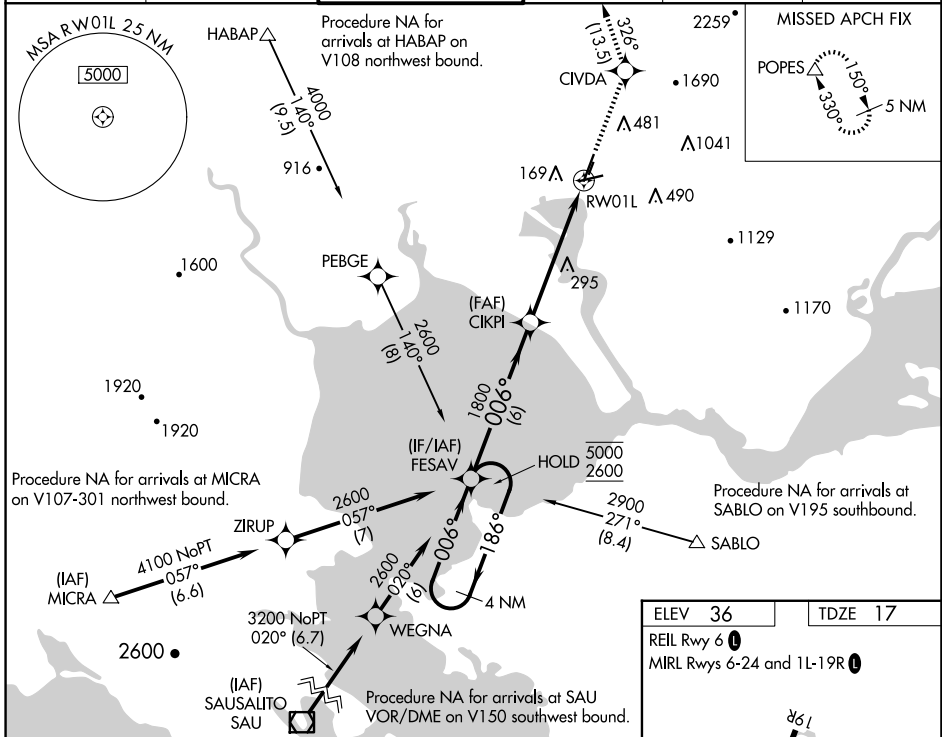

| | |
|--|----------------|
| ELEV 36 | TDZE 17 |
| REL Rwy 6 | |
| MIRL Rwy 6-24 and 1L-19R | |

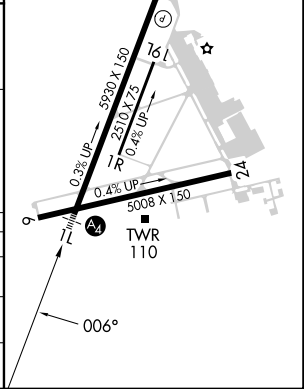

| CATEGORY | A | B | C | D |
|--------------|---------|---------------|---------------|----------------|
| LPV DA | | 217-3/4 | 200 (200-3/4) | |
| LNAV/VNAV DA | | 330-3/4 | 313 (300-3/4) | |
| LNAV MDA | 560-3/4 | 543 (600-3/4) | 560-13/8 | 543 (600-13/8) |

SW-2, 20 MAR 2025 to 17 APR 2025

SW-2, 20 MAR 2025 to 17 APR 2025