

WAAS CH 60918 W04A	APP CRS 044°	Rwy Idg 7002 TDZE 21 Apt Elev 21
--	------------------------	---

RNAV (GPS) Y RWY 4


LAGUARDIA (LGA)

RNP APCH - GPS

▼ Rwy 4 helicopter visibility reduction below RVR 5000 NA. Inop table does not apply to LPV all Cats, and LNAV Cat A and B. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1 3/8 SM. Circling NA northwest of Rwy 4 and southwest of Rwy 13. Going below glidepath may not provide obstacle clearance inside DA. Crossing Rwy threshold below charted TCH may not provide required visual area obstacle clearance. *RVR 2400 authorized with FD or AP or HUD to DA.

MALSR 	MISSED APPROACH: Climb to 2000 direct GREKO and hold, continue climb-in-hold to 2000.
-----------	--

D-ATIS ARR 125.95	NEW YORK APP CON 120.8 263.0	LAGUARDIA TOWER 118.7 263.0	GND CON 121.7 263.0	CLNC DEL 135.2	CPDLC
D-ATIS DEP 127.05					

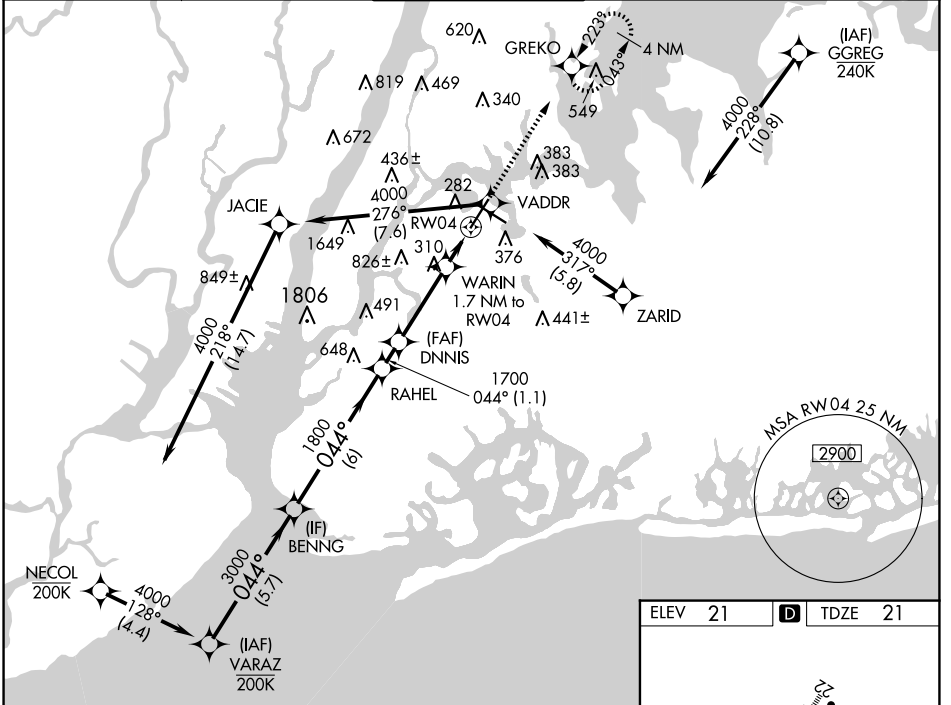


NE-2, 20 MAR 2025 to 17 APR 2025

NE-2, 20 MAR 2025 to 17 APR 2025

ELEV 21	D TDZE 21
---------	------------------

BENNG	3000	044°	RAHEL	DNNIS	WARIN	GREKO	2000
GP 3.14°	TCH 54						
			6 NM	1.1 NM	3.2 NM	1.7 NM	
CATEGORY	A		B		C		D
LPV DA*			271/40		250 (300-3/4)		
LNAV/VNAV			499/50		478 (500-1)		
LNAV MDA	560/50		539 (600-1)		560/55		539 (600-1)
C CIRCLING	680-1		659 (700-1)		700-2		760-2 1/4
					679 (700-2)		739 (800-2 1/4)

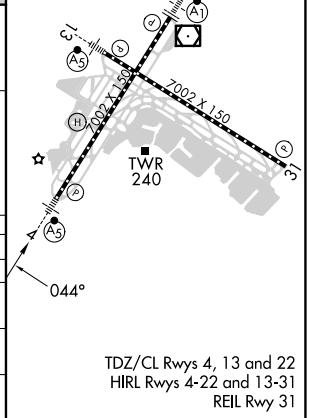

TDZ/CL Rws 4, 13 and 22
HIRL Rws 4-22 and 13-31
REIL Rwy 31