

LOC/DME F-TLK 111.5 Chan 52	APP CRS 134°	Rwy Idg TDZE 13 Apt Elev 13	9093
---	------------------------	---	-------------

ILS or LOC RWY 13L

JOHN F KENNEDY INTL (JFK)


RNAV 1-GPS or RADAR required for procedure entry.
From COVIR, KMCHI, BUZON; RNAV-1 GPS required.

▲ For inop ALS, increase S-LOC 13L Cat C/D visibility to 1½ SM.



ALSF-2

MISSED APPROACH: Climb to 600 then climbing left turn to 4000 direct DPK VOR/DME and hold.

D-ATIS (ARR/DEP) (ARR-NE) (ARR-SW) 128.725 117.7 115.4	NEW YORK APP CON 128.125 269.0	KENNEDY TOWER Rwys 4R/22L and 13L/31R 119.1 281.55 Rwys 4L/22R and 13R/31L 123.9 281.55	GND CON 121.9 348.6	CLNC DEL 135.05 348.6	CPDLC
---	--	---	-------------------------------	---------------------------------	-------

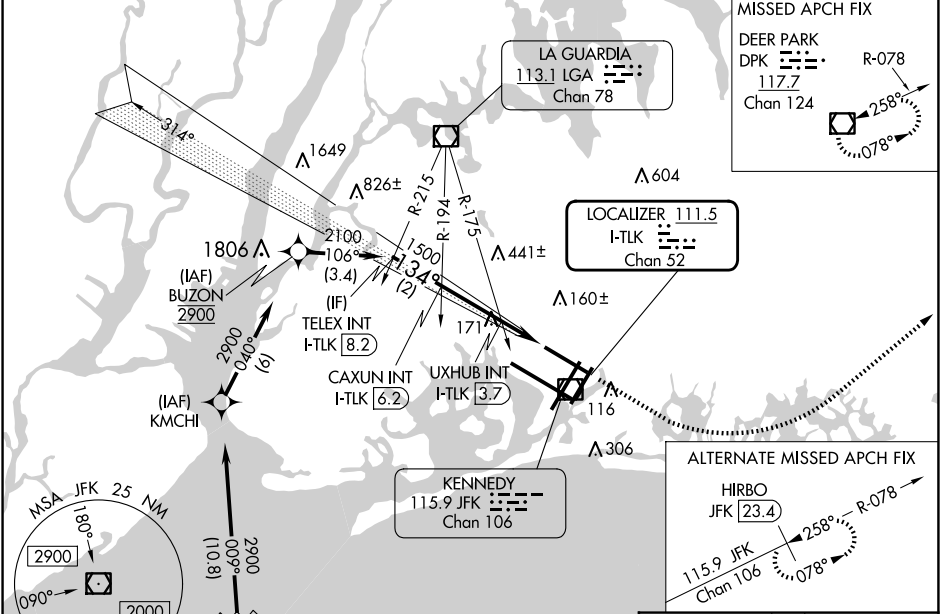

ELEV 13	D	TDZE 13
----------------	----------	----------------

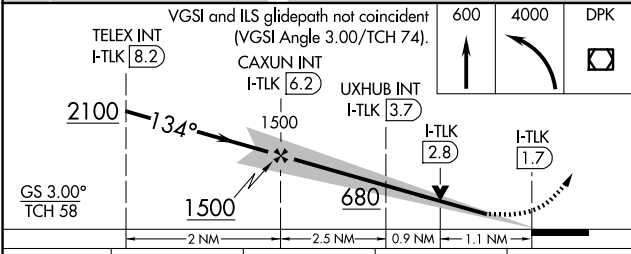

CATEGORY	A	B	C	D
S-ILS 13L	213/18		200 (200-½)	
S-LOC 13L	680-24	667 (700-½)	680-½	667 (700-1½)
C CIRCLING	680-1	667 (700-1)	700-2	700-2¼
UXHUB FIX MINIMUMS				
S-LOC 13L	440/24	427 (500-½)	440/40	427 (500-¾)
C CIRCLING	640-1	627 (700-1)	700-2	700-2¼
			687 (700-2)	687 (700-2¼)

RRLS Rwys 13L and 13R HIRL all Rwys TDZ/CL Rwys 4L, 4R, 13L, 22L and 31R	
FAW to MAP 4.5 NM	
Knots	60 90 120 150 180
Min:Sec	4:30 3:00 2:15 1:48 1:30

NE-2, 20 MAR 2025 to 17 APR 2025

NE-2, 20 MAR 2025 to 17 APR 2025