

RNAV (RNP) Z RWY 22L

JOHN F KENNEDY INTL (JFK)


APP CRS	Rwy Idg	8400
224°	TDZE	12
	Apt Elev	13

RF required. RNP AR APCH.


▼ For uncompensated Baro-VNAV systems, procedure NA below -12°C (11°F) or above 54°C (130°F). Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALS, increase RNP 0.20 all Cats visibility to RVR 5500, increase RNP 0.30 all Cats visibility to RVR 6000.

ALSF-2	MISSED APPROACH: Climb to 3000 on track 224° to WEPLA and on track 177° to CHANT and hold.


D-ATIS	NEW YORK APP CON	KENNEDY TOWER	GND CON	CLNC DEL	CPDLC
(ARR/DEP) (ARR-NE) (ARR-SW)		Rwys 4R/22L and 13L/31R	121.9	135.05	
128.725 117.7 115.4	128.125 269.0	Rwys 4L/22R and 13R/31L	123.9	281.55	
			348.6	348.6	

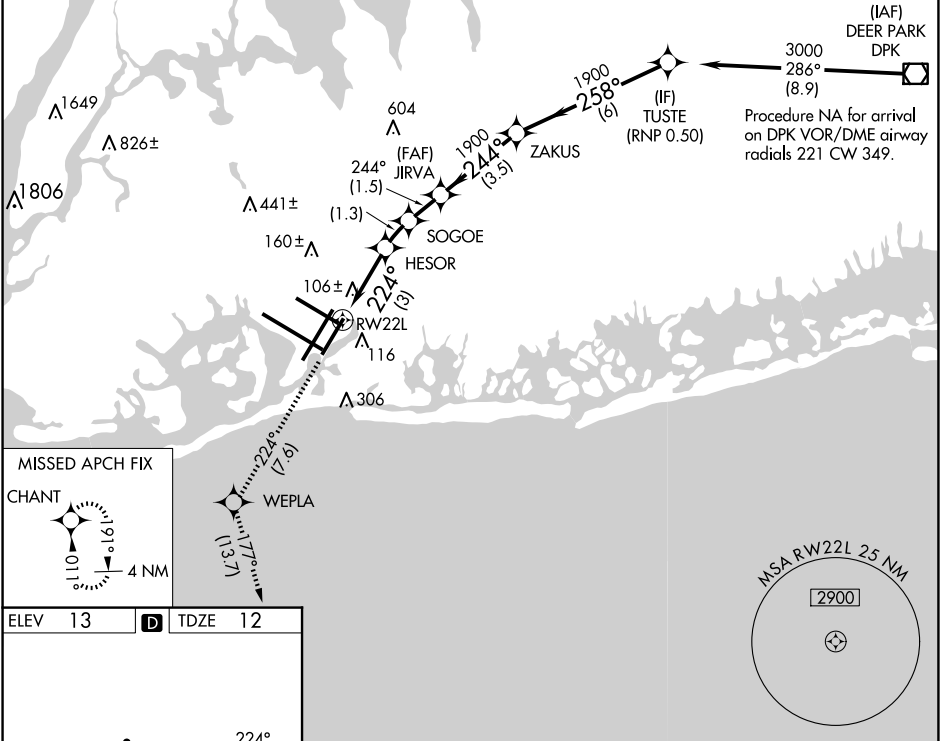

ELEV	13	D	TDZE	12
------	-----------	---	------	-----------



3000 tr 224° WEPLA tr 177° CHANT VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 66).

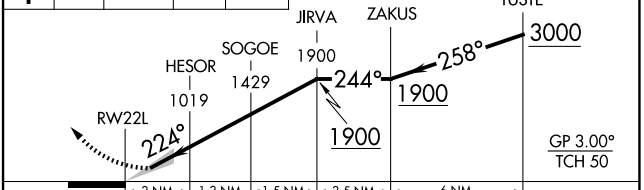

CATEGORY	A	B	C	D
RNP 0.20 DA		361/40	349 (400-¾)	
RNP 0.30 DA		421/40	409 (500-¾)	

RLS Rwys 13L and 13R
HIRL all Rwys
TDZ/CL Rwys 4L, 4R, 13L, 22L and 31R

AUTHORIZATION REQUIRED

NE-2, 20 MAR 2025 to 17 APR 2025

NE-2, 20 MAR 2025 to 17 APR 2025