


LOC I-FFV	APP CRS	Rwy Idg	7540
111.3	139°	TDZE	23
		Apt Elev	30


ILS or LOC RWY 14
SARASOTA/BRADENTON INTL (SRQ)

DME or RADAR required for LOC only.	MALSR	MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 on SRQ VOR/DME R-118 to MURDO INT/SRQ 13.6 DME and hold.
When control tower closed, S-ILS 14 Minimums NA; increase S-LOC 14 Cats A and B and ETIGY Fix Minimums S-LOC 14 all Cats visibility to 1 mile. When control tower closed, inop table does not apply to S-LOC 14 Cats A and B and ETIGY Fix Minimums S-LOC 14 all Cats.		

ATIS 124.375	TAMPA APP CON 119.65 353.575	SARASOTA TOWER ★ 120.1(CTAF) 0 256.8	GND CON 121.9 273.6	CLNC DEL 118.25	UNICOM 122.95
-----------------	---------------------------------	---	------------------------	--------------------	------------------

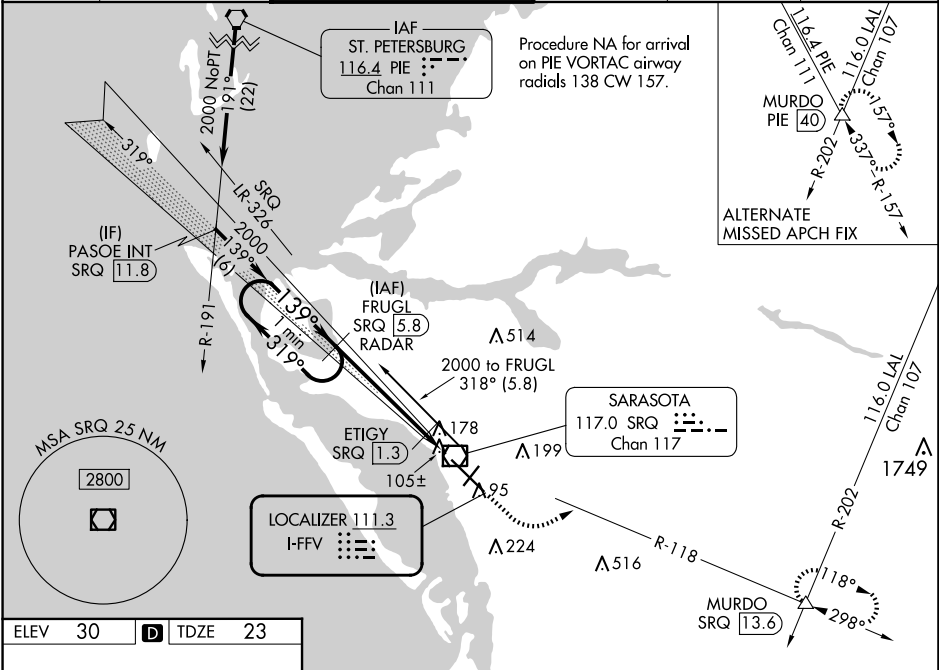

ELEV 30	D	TDZE 23
---------	---	---------

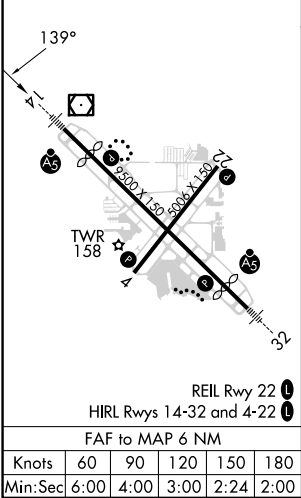

One Minute Holding Pattern		FRUGL SRQ 5.8 RADAR		1000 ↑		2000 SRQ R-118		MURDO △	
2000 ← 319° 139° → 2000		2000		ETIGY SRQ 1.3		*LOC only.			
GS 3.00° TCH 54		139°		*500					
		4.5 NM		1.5 NM					
CATEGORY	A		B		C		D		
S-ILS 14	223-½		200 (200-½)						
S-LOC 14	500-½	477 (500-½)	500-1		477 (500-1)				
CIRCLING	500-1	470 (500-1)	600-½		600-2				
		570 (600-½)		570 (600-½)		570 (600-2)			
ETIGY FIX MINIMUMS									
S-LOC 14	360-½		337 (400-½)						
CIRCLING	500-1	470 (500-1)	600-½		600-2				
		570 (600-½)		570 (600-½)		570 (600-2)			

SE-3, 20 MAR 2025 to 17 APR 2025

SE-3, 20 MAR 2025 to 17 APR 2025