


WAAS CH 86705 W14A	APP CRS 139°	Rwy Idg 7540 TDZE 23 Apt Elev 30
--	------------------------	---


RNAV (GPS) RWY 14

SARASOTA/BRADENTON INTL (SRQ)

RNP APCH.				MALSR 	MISSED APPROACH: Climb to 3000 direct GINSE and on track 107° to MURDO and hold.	
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. When control tower closed, LPV and LNAV/VNAV NA; increase LNAV all Cats visibility to 1 mile. When control tower closed, inop table does not apply to LNAV Cats A and B. When control tower closed, for inop MALSR, increase LNAV Cats C and D visibility to 1½ mile.						
ATIS 124.375	TAMPA APP CON 119.65 353.575	SARASOTA TOWER ★ 120.1(CTAF) 0 256.8	GND CON 121.9 273.6	CLNC DEL 118.25	UNICOM 122.95	

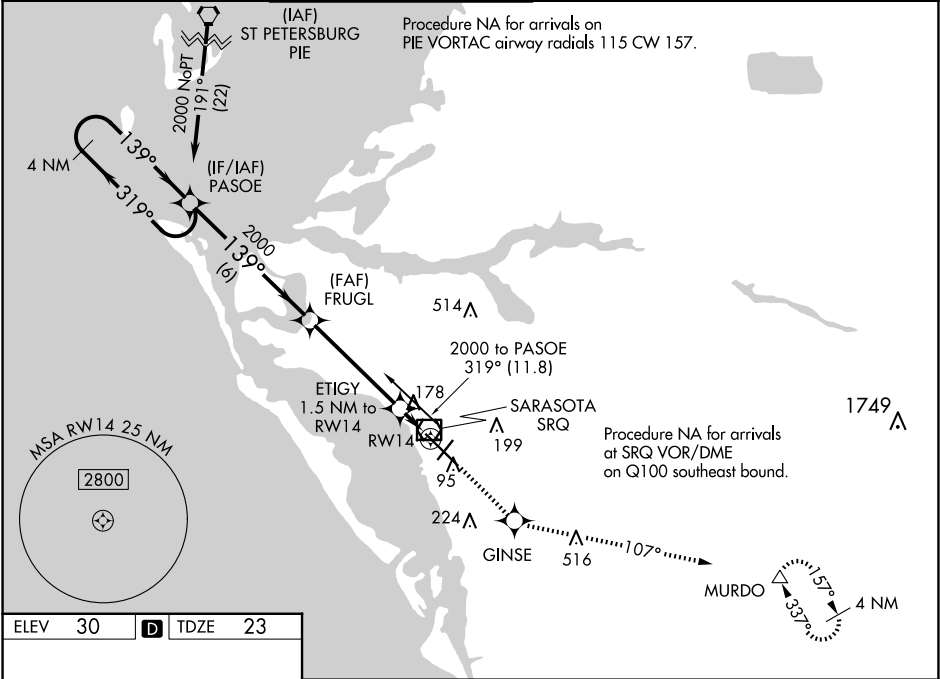

ELEV 30	D	TDZE 23
---------	---	---------

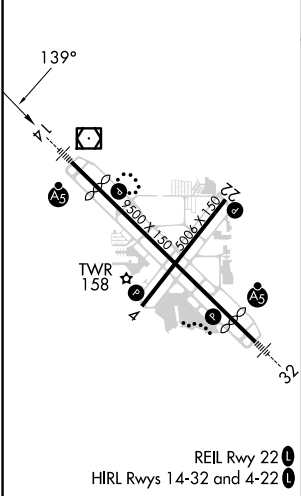

4 NM Holding Pattern		PASOE	FRUGL	3000 ↑	GINSE ✦	tr 107°	MURDO △
2000 ← 319° 139° →		2000	2000	ETIGY 1.5 NM to RW14	*LNAV only.		
GP 3.00° TCH 54		6 NM		4.5 NM	1.5 NM		
CATEGORY		A	B	C	D		
LPV DA	223-½ 200 (200-½)						
LNAV/VNAV DA	489-1⅛ 466 (500-1⅛)						
LNAV MDA	440-½ 417 (500-½)			440-¾ 417 (500-¾)			
CIRCLING	500-1 470 (500-1)			600-1½ 570 (600-1½)		600-2 570 (600-2)	