

JOHNR FIVE DEPARTURE (RNAV)

Departure Routes

TOP ALTITUDE:
FL190

RNAV 1 - DME/DME/IRU or GPS.

RADAR required for non-GPS equipped aircraft.

TAKEOFF MINIMUMS

Rwy 1L: Standard with minimum climb of 514' per NM to 8700.

Rwy 1R: Standard with minimum climb of 526' per NM to 8700.

Rwy 8L: Standard with minimum climb of 500' per NM to 2682, then minimum climb of 360' per NM to 10500.


Rwy 8R: Standard with minimum climb of 500' per NM to 2682, then minimum climb of 250' per NM to 6500.

Rwys 19L/R: Standard with minimum climb of 500' per NM to 2682, then minimum climb of 350' per NM to 9200.

Rwy 26L: Standard with minimum climb of 500' per NM to 2682, then minimum climb of 360' per NM to 9300

Rwy 26R: Standard with minimum climb of 500' per NM to 2682, then minimum climb of 360' per NM to 9000.

125.9	307.25	LAS VEGAS DEP CON
125.9	307.25	D-ATIS
132.4		CLNC DEL
118.0		CPDLC
121.1	270.8	GND CON
121.9	254.3	E of 1R/19R
121.9	254.3	W of 1L/19R
118.75	257.8	LAS VEGAS TOWER
119.9	257.8	(Rwy 8/26R, 8R/26L)
119.9	257.8	(Rwy 8/26L, 8L/26R)

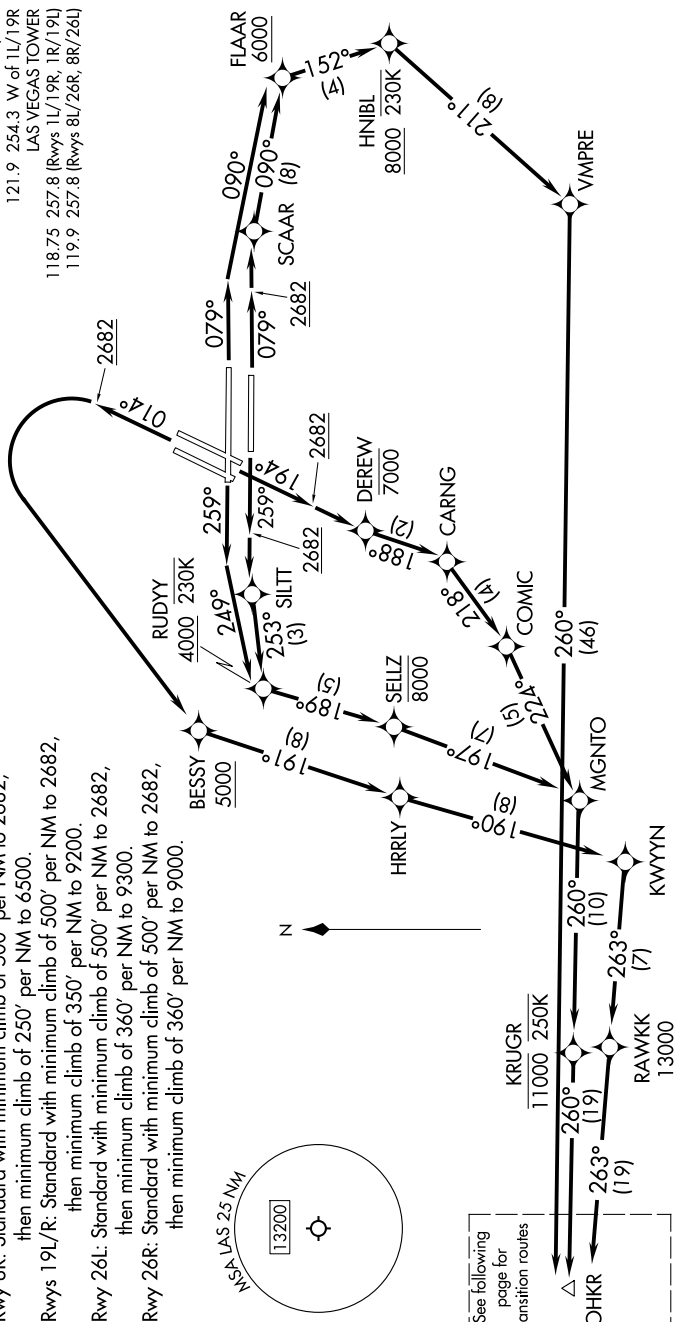

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

SW-4, 20 MAR 2025 to 17 APR 2025

JOHNR FIVE DEPARTURE (RNAV)

Departure Routes

(JOHKR5.JOHKR) 26DEC24

LAS VEGAS, NEVADA
HARRY REID INTL (LAS)