


WAAS CH 86299 W25A	APP CRS 256°	Rwy Idg TDZE 44 Apt Elev 45
--	------------------------	---

RNAV (GPS) RWY 25

OXNARD (OXR)

RNP APCH - GPS. ⚠ Inoperative table does not apply. Baro-VNAV NA when using Camarillo altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. When local altimeter setting not received, use Camarillo altimeter setting and increase LPV DA to 440 feet, LNAV/VNAV DA to 437 feet. Increase all MDAs 20 feet and Circling Cat C visibility ¼ SM.	MALSF 	MISSED APPROACH: Climb to 2000 direct PEWKI and on track 239° to SQUID and hold.
--	-----------	--

ATIS 118.05	POINT MUGU APP CON* 124.7 335.5	OXNARD TOWER* 134.95 (CTAF) 257.8	GND CON 121.9
-----------------------	---	---	-------------------------

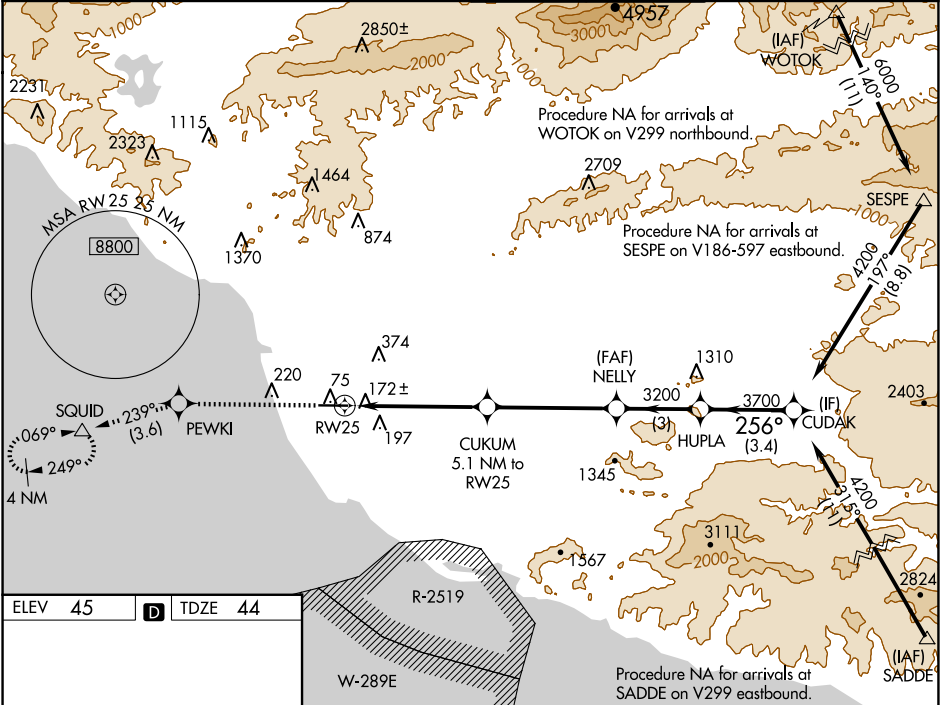

ELEV 45	D	TDZE 44
REIL Rwy 7		
MIRL Rwy 7-25		
2000	PEWKI	SQUID
↑	tr 239°	△
1.3 NM to RW25		
CUKUM 5.1 NM to RW25		
1720		
1.3 NM		
3.8 NM		
4.6 NM		
3 NM		
3.4 NM		
NELLY 3200		
HUPLA 3700		
CUDAK 4200		
GP 3.00° TCH 58		
CATEGORY	A	B
LPV DA	424-1	380 (400-1)
LNAV/VNAV DA	421-1	377 (400-1)
LNAV MDA	520-1 476 (500-1)	520-1 476 (500-1)
CIRCLING	520-1 475 (500-1)	700-1 760-2 655 (700-1) 715 (800-2)