



WAAS CH 65805 W13A	APP CRS 131°	Rwy Idg 6502 TDZE 1500 Apt Elev 1500
--	------------------------	---

RNAV (GPS) RWY 13
JAMESTOWN RGNL (JMS)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F)
A or above 54°C (130°F). Rwy 13 helicopter visibility reduction below $\frac{3}{4}$ SM NA.
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3500
direct FAMDU and hold.

ASOS 118.425	MINNEAPOLIS CENTER 124.2 270.3	UNICOM 123.0 (CTAF) ①
------------------------	--	---------------------------------

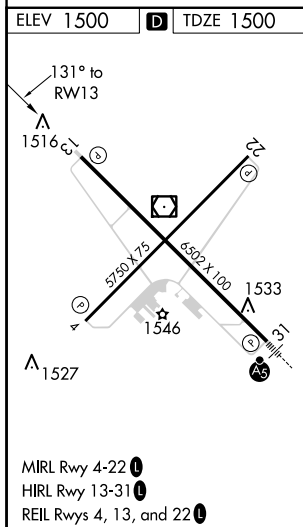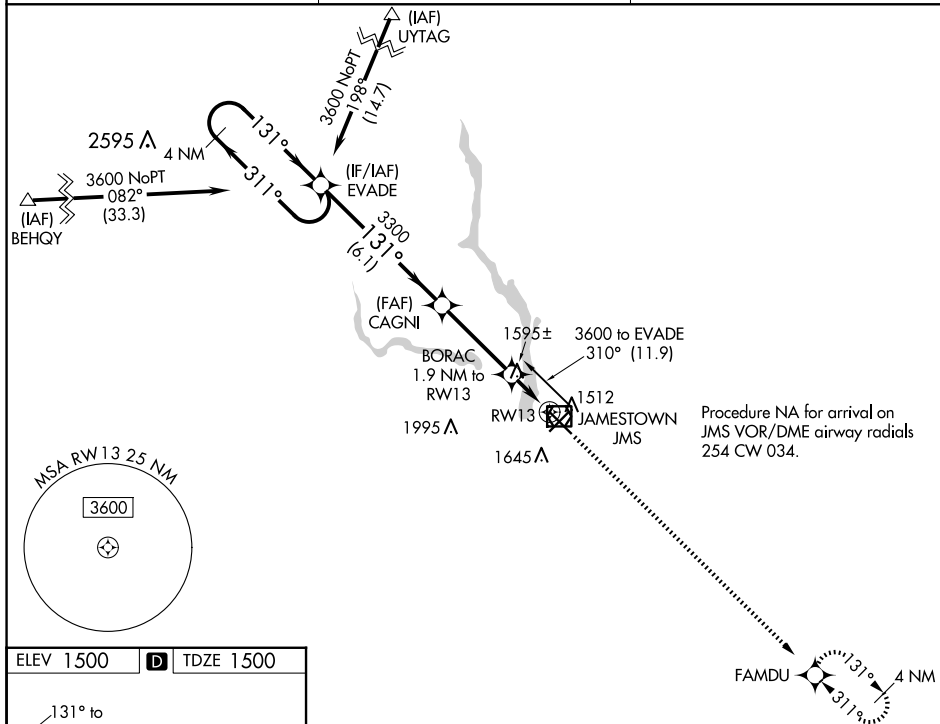

RNAV Approach Procedure Data:

CATEGORY	A	B	C	D
LPV DA	1787-1		287 (300-1)	
LNAV/VNAV DA	1820-1		320 (400-1)	
LNAV MDA	1860-1 360 (400-1)			1860-1½ 360 (400-1½)
C CIRCLING	1960-1	460 (500-1)	2000-1½ 500 (500-1½)	2300-2½ 800 (800-2½)