

ILS Z or LOC Z RWY 7L

LOC/DME I-NPA 109.3 Chan 30	APCH CRS 069°	Rwy Idg TDZE 23 Arpt Elev 28
8001		


[USN] PENSACOLA NAS (FORREST SHERMAN FLD) (KNPA)

RADAR, TACAN, and DME required
* When ALS inop, increase vis to ¾ mile.
** When ALS inop, increase vis to 1 mile


ALS-F-1

MISSED APPROACH: Climb to 600. Then climbing right turn to 1500 via NPA R-145 to CUPER and hold.


ATIS 124.35 266.8	APP CON 120.65 270.8	SHERMAN TOWER 120.7 340.2	GND CON 121.7 336.4	CLNC DEL 134.1 268.7	ASR/ PAR
-----------------------------	--------------------------------	-------------------------------------	-------------------------------	--------------------------------	-------------

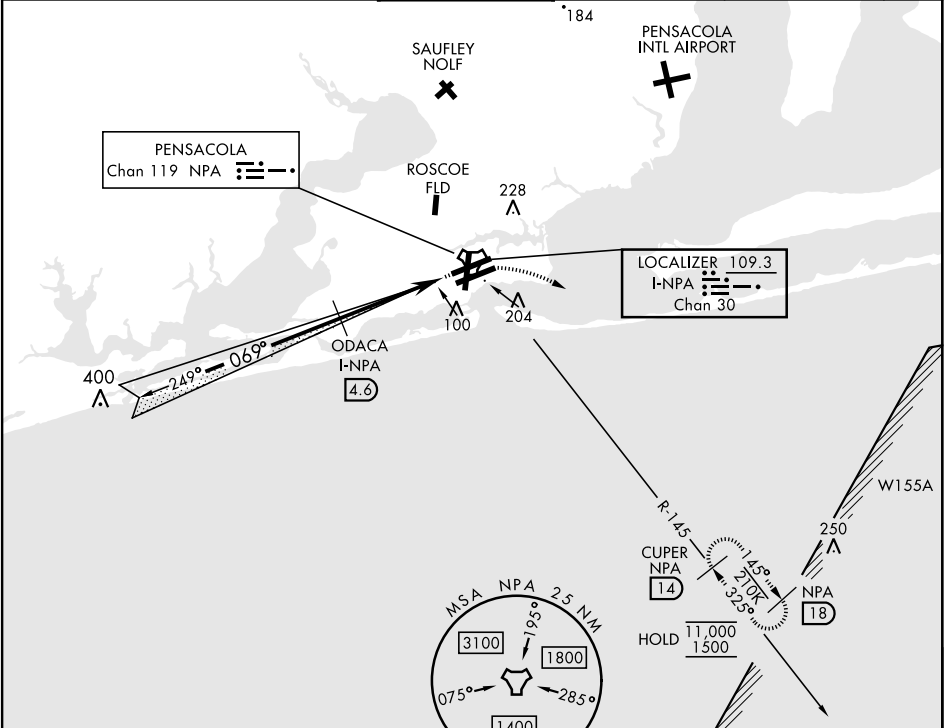

EMERG SAFE ALT 100 NM 3100

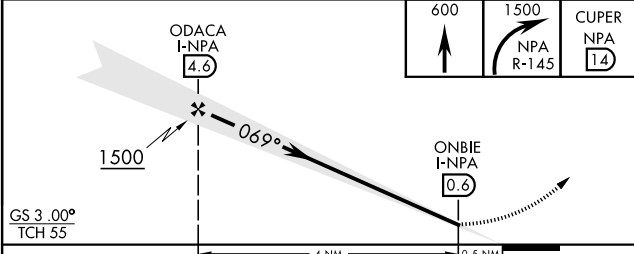

GS 3.00° TCH 55					
CATEGORY	A	B	C	D	E
S-ILS 7L*		223-½	200	(200-½)	
S-LOC 7L**		360-½	337	(400-½)	
CIRCLING	520-1	492 (500-1)	540-1½ 512 (600-1½)	600-2 572 (600-2)	640-2¼ 612 (700-2¼)

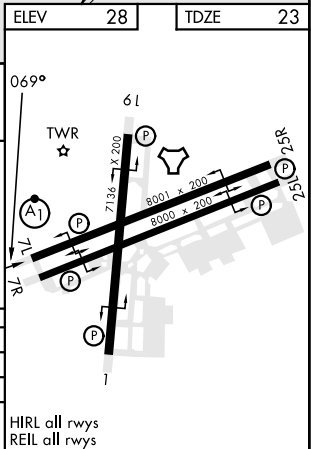

ILS Z or LOC Z RWY 7L

SE-3, 20 MAR 2025 to 17 APR 2025

SE-3, 20 MAR 2025 to 17 APR 2025