

WAAS CH 72925 W04A	APP CRS 035°	Rwy Idg TDZE 2380 Apt Elev 2380
--	------------------------	---


RNAV (GPS) RWY 4

AVENGER FLD (SWW)

⚠ Baro-VNAV NA when using Snyder altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 29°C (84°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Snyder altimeter setting and increase LPV DA to 2702 feet and LNAV/VNAV DA to 2799 feet, and all MDAs 80 feet; increase LPV visibility all Cats ⅓ SM, LNAV/VNAV visibility all Cats ¼ SM, LNAV visibility Cats C/D ⅓ SM, and Circling Cats C/D visibility ¼ SM. When VGSI inop, Straight-in/ Circling Rwy 4 procedure NA at night. When VGSI inop, Circling Rwy 17 and 22 NA at night.

MISSED APPROACH:
Climb to 4400 direct
AWBIR and hold.

AWOS-3 119.025	ABILENE APP CON 127.2 282.3	UNICOM 122.8 (CTAF)
--------------------------	---------------------------------------	-------------------------------

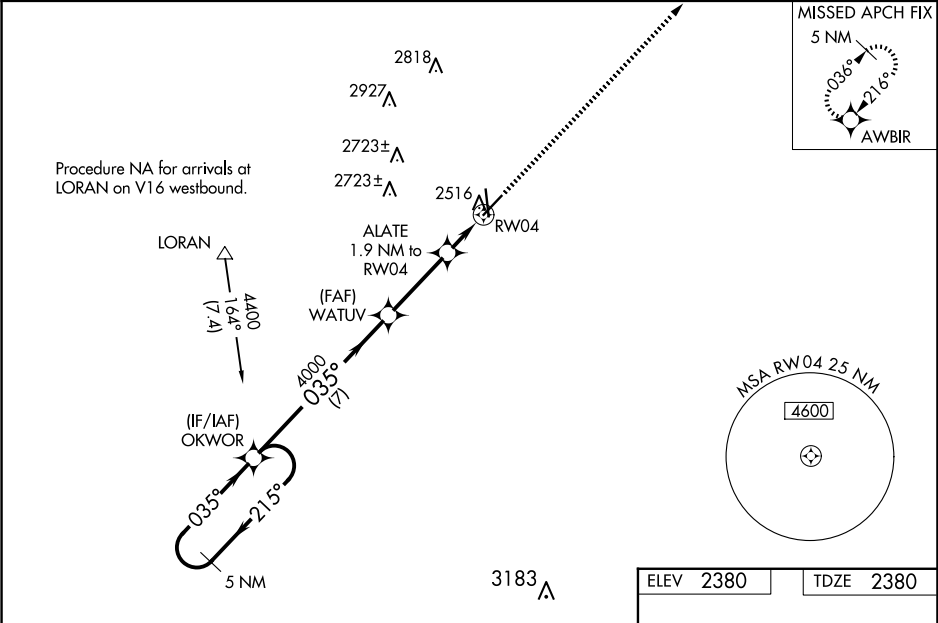

5 NM Holding Pattern OKWOR ←215° →035° 4400 GP 3.00° TCH 40				WATUV 4000 035° 4000 *3020 ALATE 1.9 NM to RW04 RW04 *LNAV only.				4400 ↑	AWBIR ✱
CATEGORY		A	B		C		D		
LPV	DA	2630-1 250 (300-1)							
LNAV/VNAV	DA	2727-1 1/8 347 (400-1 1/8)							
LNAV	MDA	2820-1 440 (500-1)			2820-1 1/4 440 (500-1 1/4)				
CIRCLING		2880-1 500 (500-1)			3080-2 700 (700-2)		3080-2 1/4 700 (700-2 1/4)		

