

WAAS
CH **82401**
W34A

APP CRS
340°

Rwy Idg
TDZE
Apt Elev

7000
674
682

RNAV (GPS) RWY 34

DRAUGHON-MILLER CENTRAL TEXAS RGNL (TPL)


RNP APCH.


▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C .

MISSED APPROACH: Climb to 3000 direct ILSAZ and hold.

AWOS-3PT 134.975	GRAY APP CON 120.075 370.0	CLNC DEL 125.9	UNICOM 123.0 (CTAF) 0
----------------------------	--------------------------------------	--------------------------	---------------------------------

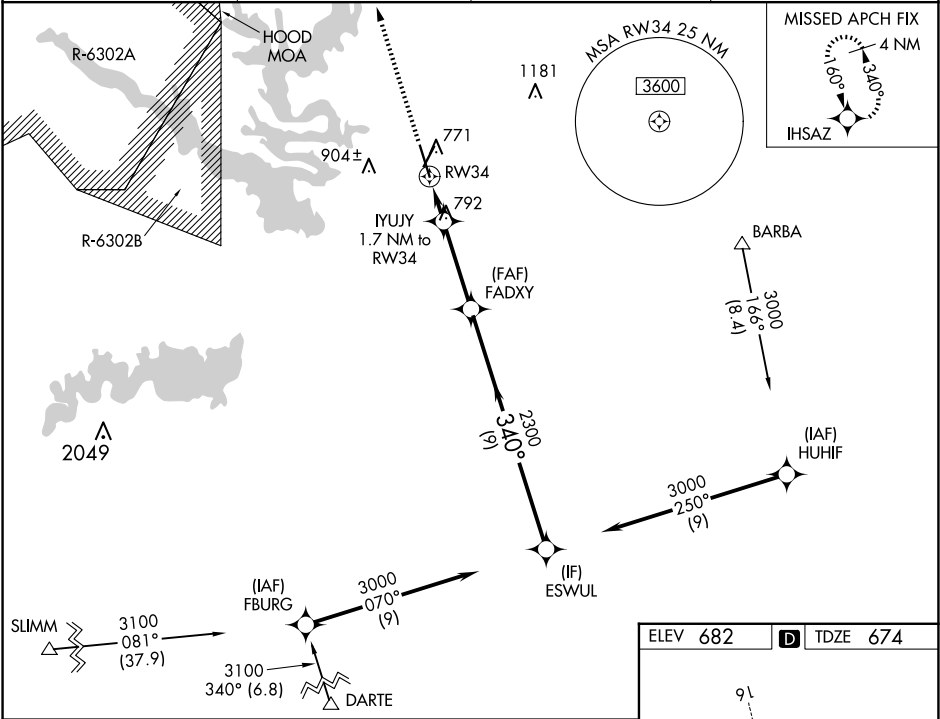

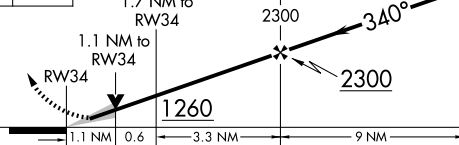3000	IHSZ	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 34).				ESWUL
						3000
		1260		2300	GP 3.00° TCH 50	
CATEGORY		A	B	C	D	
LPV	DA	874-¾ 200 (200-¾)				
LNAV/ VNAV	DA	924-¾ 250 (300-¾)				
LNAV	MDA	1060-1	386 (400-1)	1060-1⅛	386 (400-1⅛)	
 CIRCLING		1140-1 458 (500-1)	1200-1 518 (600-1)	1280-1½ 598 (600-1½)	1420-2¼ 738 (800-2¼)	

