

WAAS
CH **97638**
W24A

APP CRS
239°

Rwy Idg **7003**
TDZE **237**
Apt Elev **258**

RNAV (GPS) RWY 24
SHREVEPORT RGNL (SHV)

RNP APCH.

▼

ASR

Rwy 24 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct DOCKK and hold, continue to climb-in-hold to 3000.


ATIS
128.45

SHREVEPORT APP CON
119.9 335.55

SHREVEPORT TOWER
121.4 236.775

GND CON
121.175 236.775

CLNC DEL
124.65

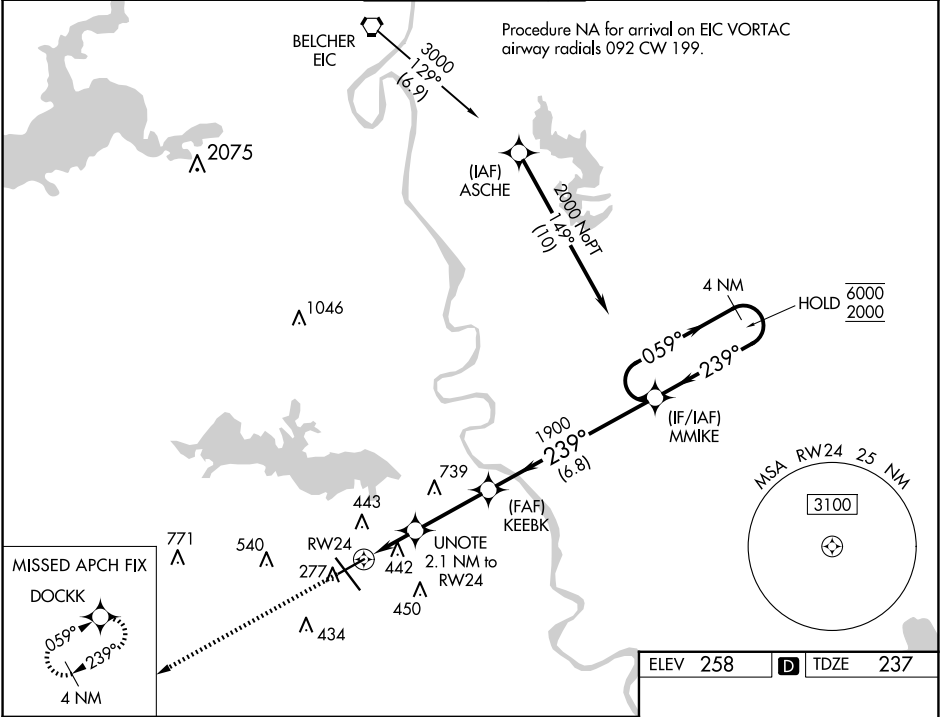

3000 DOCKK

↑

★

*LNAV only.

RW24

UNOTE 2.1 NM to RW24

KEEBK 1900

MMIKE 4 NM Holding Pattern

DOCKK 3000

GP 3.00° TCH 50

1.3 NM

0.8 NM

3 NM

6.8 NM

CATEGORY	A	B	C	D
LPV DA	487-7⁄8 250 (300-7⁄8)			
LNAV/VNAV DA	749-1¾ 512 (500-1¾)			
LNAV MDA	700-1 463 (500-1)	700-1¾ 463 (500-1¾)		
CIRCLING	760-1 502 (600-1)	980-2 1100-2¾ 722 (800-2) 842 (900-2¾)		

ELEV 258

D

TDZE 237

REIL Rwy 6 and 24

TDZ/CL Rwy 14

HIRL Rwy 14-32

MIRL Rwy 6-24