


WAAS CH 99330 W16A	APP CRS 158°	Rwy Idg TDZE Apt Elev	4800 213 213
--	------------------------	-----------------------------	---



RNAV (GPS) RWY 16
TRENTON MERCER (TTN)



▼ Night Landing: Rwy 34 operational VGSi required, remain on or above VGSi glidepath until threshold. Baro-VNAV NA when using Northeast Philadelphia altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. ▲ Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received use Northeast Philadelphia altimeter setting; increase LPV DA to 510 feet and all Cats visibility ½ SM, LNAV/VNAV DA to 576 feet; increase all MDA 60 feet and LNAV Cat C/D visibility ½ SM and Circling Cat C visibility ½ SM.	MISSED APPROACH: Climb to 1500 then climbing right turn to 2700 direct ZUBAX and hold.
---	---

ATIS 126.775	PHILADELPHIA APP CON 123.8 291.7	TRENTON TOWER ★ 120.7 (CTAF) 0 257.8	GND CON 121.9 257.8	CLNC DEL 121.9 257.8	UNICOM 122.95
------------------------	--	--	-------------------------------	--------------------------------	-------------------------

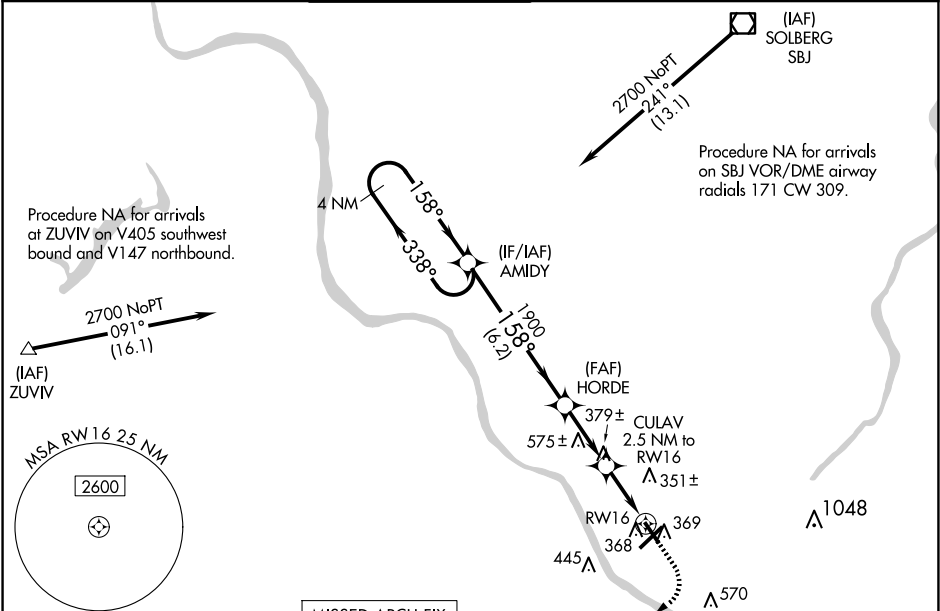

ELEV 213	D	TDZE 213
-----------------	----------	-----------------

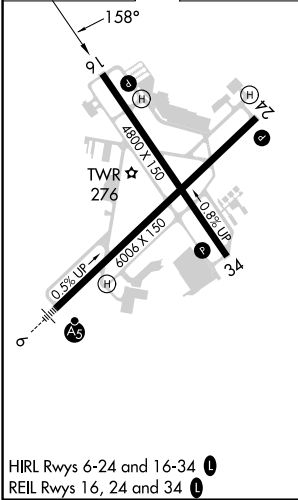

1500 2700 ZUBAX		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 40).		4 NM Holding Pattern	
					
* LNAV only.		CULAV 2.5 NM to RW16		HORDE 1900	
					
		* 1.2 NM to RW16		* 1060	
				AMIDY	
				2700	
				GP 3.00° TCH 55	
CATEGORY		A		B	
LPV DA		463-¾		250 (300-¾)	
LNAV/ VNAV DA		529-1		316 (400-1)	
LNAV MDA		640-1 427 (500-1)		640-1¼ 427 (500-1¼)	
CIRCLING		680-1 467 (500-1)		760-1½ 960-2½ 547 (600-1½) 747 (800-2½)	

NE-2, 20 MAR 2025 to 17 APR 2025

NE-2, 20 MAR 2025 to 17 APR 2025