

| | | |
|--|------------------------|--|
| WAAS CH 63019 W19A | APP CRS 196° | Rwy Idg 10302 TDZE 1330 Apt Elev 1333 |
|--|------------------------|--|

RNAV (GPS) Y RWY 19R




WICHITA DWIGHT D EISENHOWER NTL (ICT)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inoperative MALSR, increase LNAV Cat C/D visibility to RVR 6000. # RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3600 direct CUTIK and hold.

| | | | | |
|-----------------------|---------------------------------------|-------------------------------------|-------------------------------|--------------------------|
| ATIS 125.15 | WICHITA APP CON 126.7 353.5 | WICHITA TOWER 118.2 257.8 | GND CON 121.9 348.6 | CLNC DEL 125.7 |
|-----------------------|---------------------------------------|-------------------------------------|-------------------------------|--------------------------|

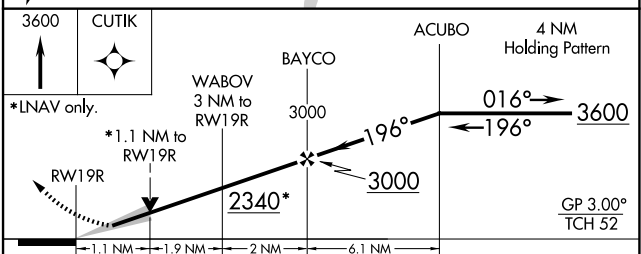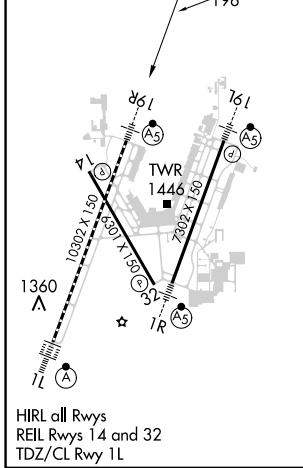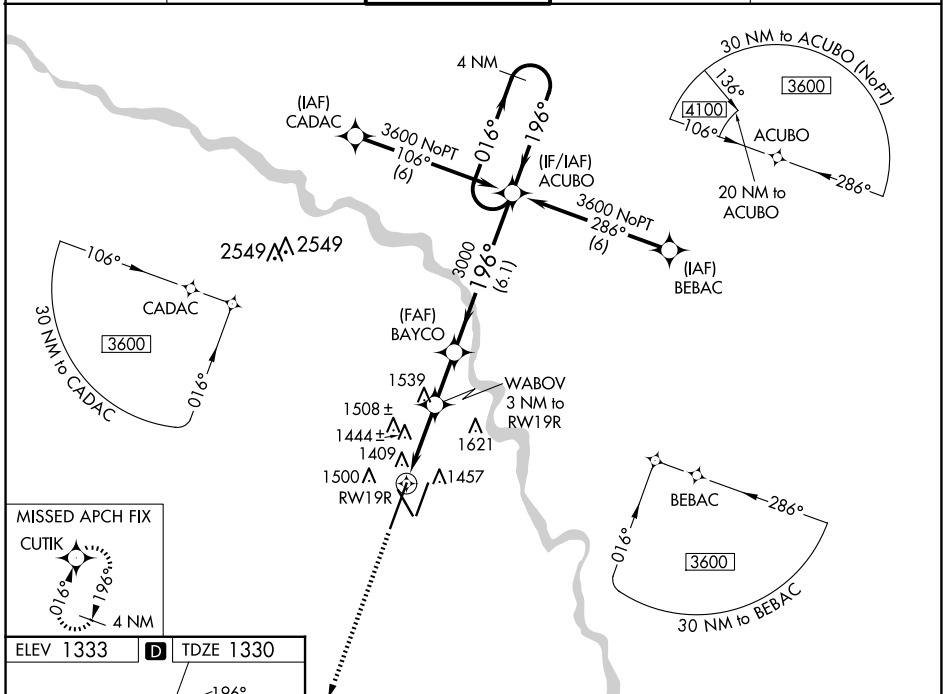

| CATEGORY | A | B | C | D |
|-------------------|---------------------|---|---|---|
| LPV DA # | 1530/24 | | 200 (200-½) | |
| LNAV/VNAV DA | 1742/45 | | 412 (500-¾) | |
| LNAV MDA | 1740/24 410 (500-½) | | 1740/40 410 (500-¾) | |
| C CIRCLING | 1800-1 467 (500-1) | | 1980-1¾ 647 (700-1¾) 1980-2 647 (700-2) | |

NC-2, 20 MAR 2025 to 17 APR 2025

NC-2, 20 MAR 2025 to 17 APR 2025