

WAAS CH 40009 W24A	APP CRS 236°	Rwy Idg TDZE Apt Elev 9002 66 66
--	------------------------	--

RNAV (GPS) RWY 24

FRANCIS S GABRESKI (F'OK)

⚠

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Shirley altimeter setting: increase LPV DA to 293 feet; increase LNAV/VNAV DA to 632 feet and all Cats visibility ½ SM; increase all MDAs 40 feet and Circling Cat C visibility ¼ SM. Baro-VNAV and VDP NA when using Shirley altimeter setting. Circling Rwy 15 NA at night.


MALSRL



MISSED APPROACH:

Climb to 2600 direct ZATBO and hold.

ASOS 119.925	NEW YORK APP CON 125.975 343.65	SUFFOLK COUNTY TOWER ★ 125.3 (CTAF) 0 236.6	GND CON 121.8 225.4
------------------------	---	---	-------------------------------

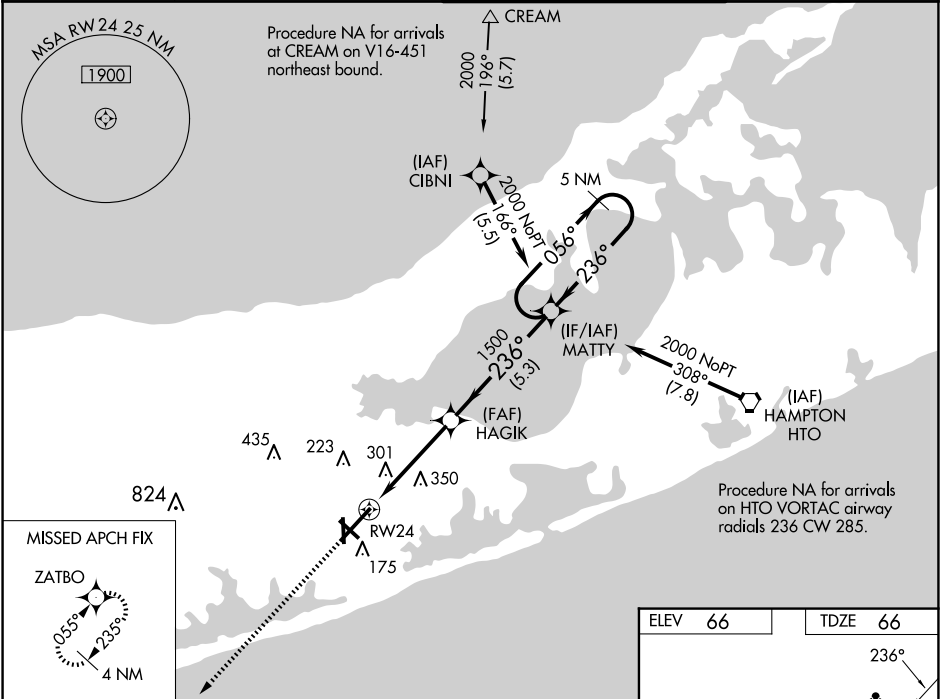

2600

↑

ZATBO

✧

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 77).

5 NM

Holding Pattern

MATTY

056° →

← 236°

2000

GP 3.00°

TCH 55

HAGIK

1500

236°

1500

*1.3 NM to RW24

1.3

3 NM

5.3 NM

RW24

*LNAV only

CATEGORY	A		B	C	D
LPV DA			266-½	200 (200-½)	
LNAV/VNAV DA			605-1⅜	539 (600-1⅜)	
LNAV MDA	560-½ 494 (500-½)		560-1	494 (500-1)	
CIRCLING	600-1 534 (600-1)	620-1 554 (600-1)	700-1¾ 634 (700-1¾)	740-2¼ 674 (700-2¼)	

