

LOC/DME I-AKN 110.3 Chan 40	APP CRS 121°	Rwy Idg 8501 TDZE 62 Apt Elev 73
---	------------------------	---

ILS Y or LOC Y RWY 12
KING SALMON (AKN)(PAKN)

DME required.


T
A Autopilot coupled approach NA below 700. For inop ALS, increase S-ILS 12 Cat E visibility to RVR 4000. For inop ALS, increase S-LOC 12 Cat C-E visibility to RVR 5500. When control tower closed: increase S-ILS 12 and S-LOC 12 visibilities to RVR 5000 all Cats. When control tower closed, inop table does not apply.

MALSR



MISSED APPROACH: Climb to 600 then climbing right turn to 3000 on heading 240° and AKN VORTAC R-210 to OLLER/15 DME and hold.

ATIS 128.8	ANCHORAGE CENTER 124.8 354.0	KING SALMON TOWER* 118.3 279.5	GND CON 121.9	UNICOM 122.95	CTAF 121.9 352.05
---------------	---------------------------------	-----------------------------------	------------------	------------------	----------------------

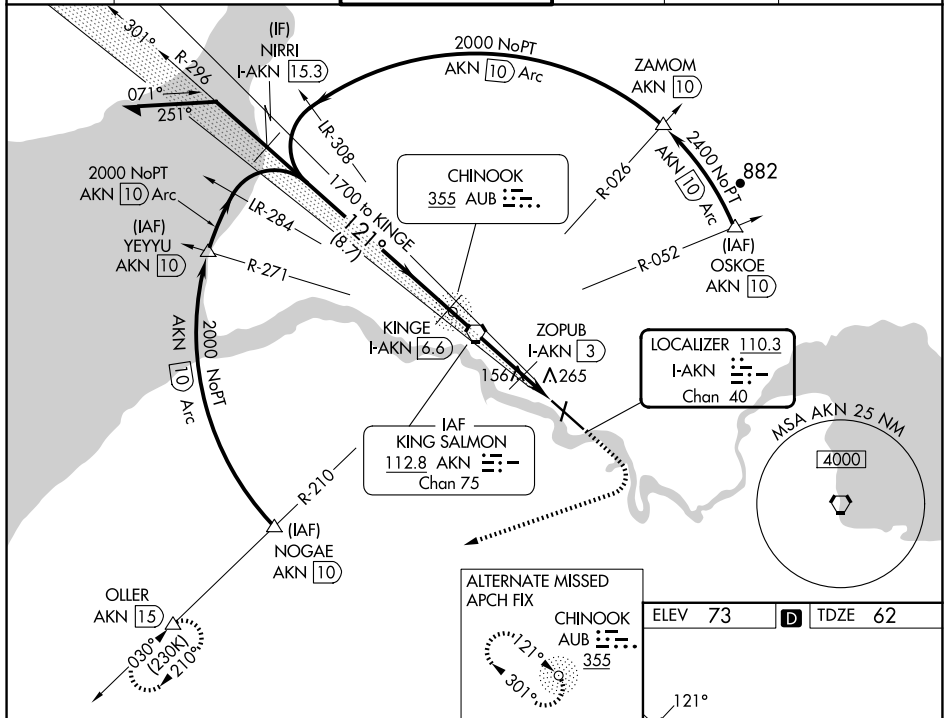

Use I-AKN DME when on the localizer course.

Remain

21

AKN
VORTAC

60

30

OLLER

* LOC only

$$\frac{\text{GS } 3.00^\circ}{\text{TCH } 66}$$

1700

--	--



CATEGORY	A	B	C	D	E
S-ILS 12	262/24 200 (200-½)				
S-LOC 12	420/24 358 (400-½)		420/30 358 (400-⅔)		

MIRL Rwy 18-36 L

HIRL Rwy 12-30 **L**

ILS Y or LOC Y RWY 12