

RNAV (GPS) RWY 11

APCH CRS	Rwy Idg
105°	318
TDZE	Arpt Elev
	322


[USN]

GOLIAD NOLF (KNGT)

RNP APCH

MISSED APPROACH: Climb to 4000 direct SWEEN and hold, continue climb-in-hold to 4000.

When local altimeter setting not received, use Beeville Muni altimeter setting.

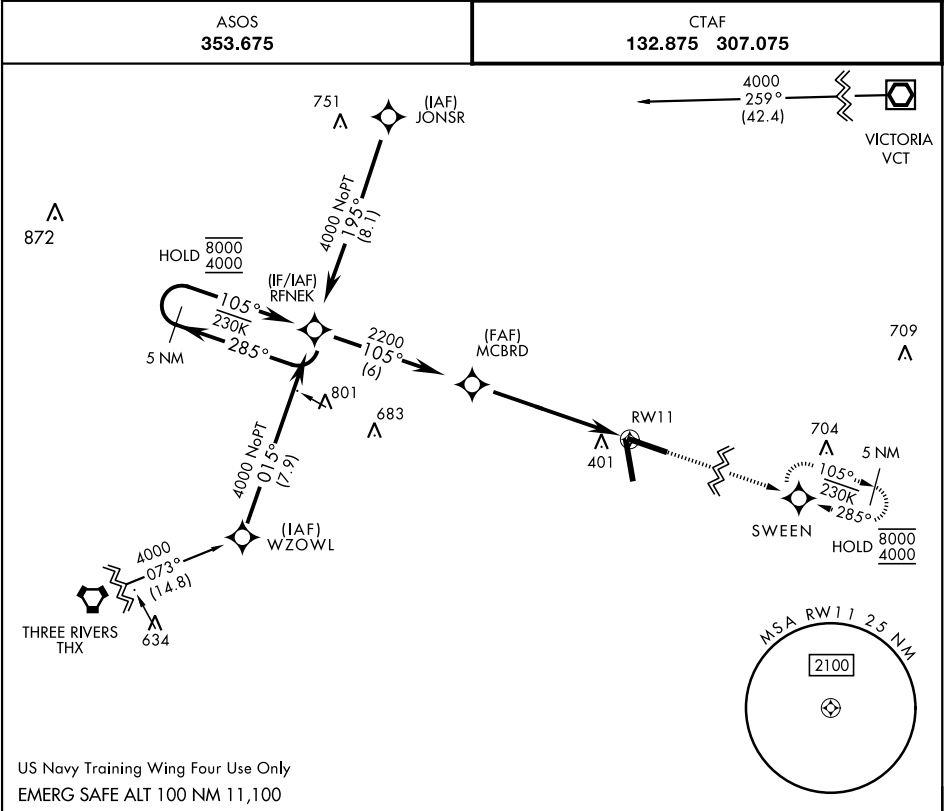

US Navy Training Wing Four Use Only
EMERG SAFE ALT 100 NM 11,100

5 NM Holding Pattern

RFNEK

8000
4000

285°

105°

MCBRD

2200

105°

3.00°

TCH 54

5.7 NM

1.1 NM to RWY11

RWY11

4000

SWEEN

CATEGORY	A	B	C	D
RNAV MDA	720-1 402 (400-1)	720-1 402 (400-1)	720-1 402 (400-1)	720-1 402 (400-1)
CIRCLING	800-1 478 (500-1)	820-1 498 (500-1)	820-1 498 (500-1)	880-2 558 (600-2)
BEEVILLE MUNI ALTIMETER SETTING MINIMA				
RNAV MDA	760-1 442 (500-1)	760-1 442 (500-1)	760-1 442 (500-1)	760-1 442 (500-1)
CIRCLING	800-1 478 (500-1)	820-1 498 (500-1)	820-1 498 (500-1)	880-2 558 (600-2)

ELEV 322

TDZE 318

105°

0.7% DOWN

8000 x 1.50

20

35

0.35 x 1.50

40

HIRL Rwy 11-29, 17-35

TDZL Rwy 11-29, 17-35

RNAV (GPS) RWY 11

SC-3, 20 MAR 2025 to 17 APR 2025

SC-3, 20 MAR 2025 to 17 APR 2025