

WAAS CH 63139 W11A	APP CRS 111°	Rwy Idg TDZE 775 Apt Elev 777
--	------------------------	---

RNAV (GPS) RWY 11

AUBURN UNIVERSITY RGNL (AUO)


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Columbus altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Columbus altimeter setting: increase LPV DA to 1138 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 1173 feet and visibility all Cats ⅜ SM; increase all MDA 120 feet and LNAV Cats C/D and Circling Cat C visibility ¼ SM and Circling Cat D visibility ½ SM.

MISSED APPROACH:
Climb to 1200 then climbing right turn to 3000 direct HESEL and hold.

AWOS-3PT 132.575	ATLANTA APP CON ★ 125.5 323.1	AUBURN TOWER ★ 123.875	GND CON★ 121.625	CLNC DEL 118.7 (When twr closed)	UNICOM 123.0 (CTAF) 0
----------------------------	---	----------------------------------	----------------------------	---	--

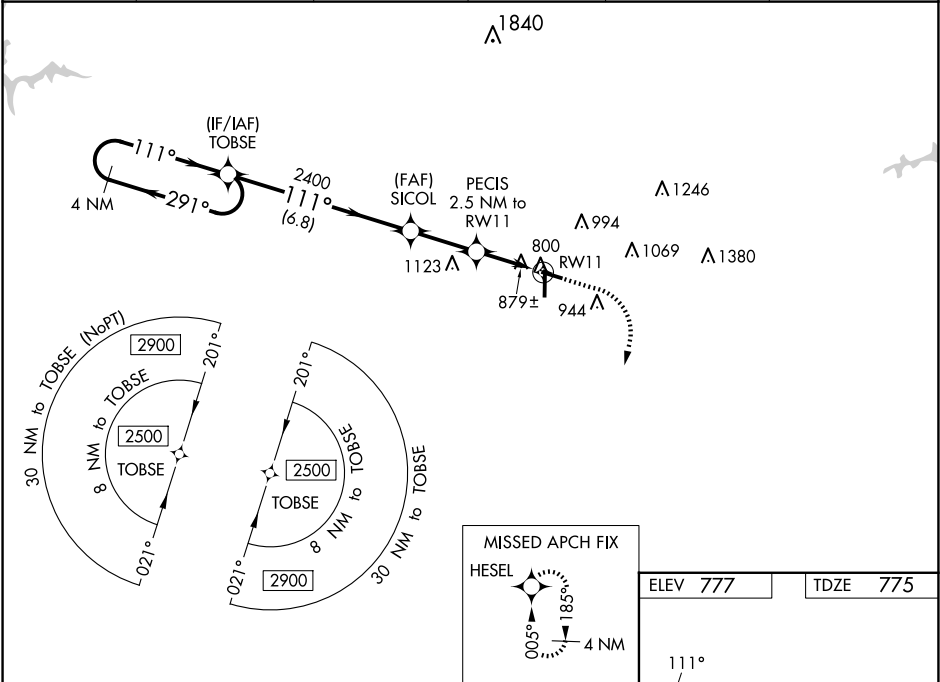

4 NM Holding Pattern TOBSE

GP 3.00° TCH 45

2500 ← 291° / 111° →

2400

SICOL 2400

PECIS 2.5 NM to RW11

*1.1 NM to RW11

RW11

6.8 NM | 2.5 NM | 1.4 NM | 1.1 NM

A | B | C | D

1200

3000

HESEL

*LNAV only.

CATEGORY				
LPV DA	1025-1 250 (300-1)			
LNAV/VNAV DA	1060-1 285 (300-1)			
LNAV MDA	1160-1	385 (400-1)	1160-1½	385 (400-1½)
CIRCLING	1280-1 503 (600-1)	1360-1 583 (600-1)	1380-1¾ 603 (700-1¾)	1480-2¼ 703 (800-2¼)

ELEV 777

TDZE 775

111°

81

4000 X 75

5264 X 100

0.9% UP

36

MIRL Rwy 11-29 0

HIRL Rwy 18-36 0