


WAAS CH 97300 W04A	APP CRS 037°	Rwy Idg 7200 TDZE 4205 Apt Elev 4216
--	------------------------	---

RNAV (GPS) RWY 4

CLOVIS RGNL (CVN)

RNP APCH - GPS.		MALSR	MISSED APPROACH: Climb to 6000 direct RIMKE and hold.
⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C or above 49°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM. Circling NA to Rwy 8 and 26.		⚠	
AWOS-3PT 135.375	CANNON APP CON 118.425 352.1	CLNC DEL 119.0	UNICOM 122.8 (CTAF) 0

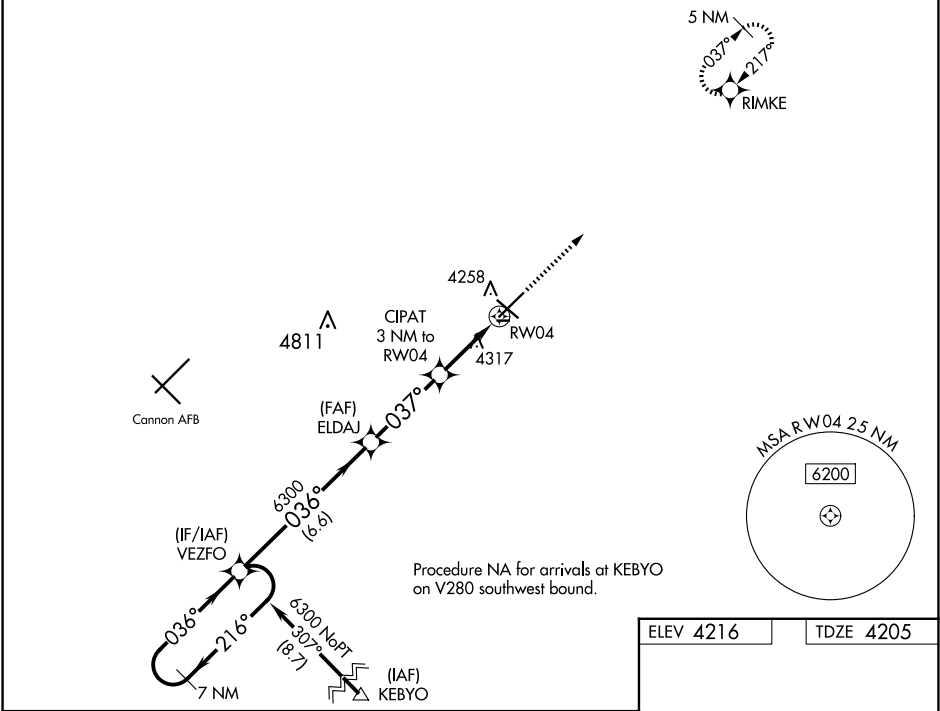

7 NM Holding Pattern		VEZFO		ELDAJ		CIPAT 3 NM to RW04		1.2 NM to RW04		6000	RIMKE
CATEGORY		A		B		C		D			
LPV DA				4405-1/2		200 (200-1/2)					
LNAV/ VNAV DA				4455-1/2		250 (300-1/2)					
LNAV MDA		4640-1/2	435 (500-1/2)			4640-3/4	435 (500-3/4)				
CIRCLING		4680-1	464 (500-1)			4700-1 1/2 484 (500-1 1/2)	4820-2 604 (700-2)				

