

WAAS CH 50223 W23A	APP CRS 235°	Rwy Idg 5004 TDZE 921 Apt Elev 921
--	------------------------	---

RNAV (GPS) RWY 23
TAYLOR COUNTY (AAS)

MISSED APPROACH:
Climb to 3000 direct
KANOA and hold.

AWOS-3 121.125	INDIANAPOLIS CENTER 124.625 353.65	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------------

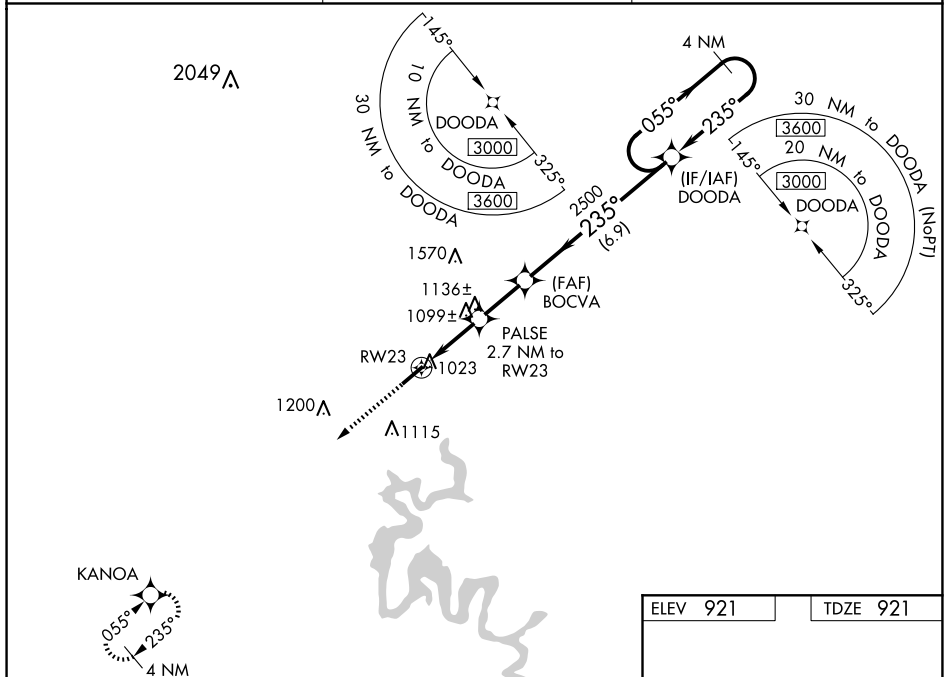


Figure 1-1 illustrates RNAV (L) and RNAV (T) flight paths. The diagram shows a flight path starting from a 3000 ft altitude, descending to 2500 ft, and then climbing to 3000 ft. Key points include KANOA, DOODA, and BOCVA. Distances are marked: 2.7 NM, 2.1 NM, and 6.9 NM. Angles are marked: 055° and 235°. A holding pattern is shown at 3000 ft. The diagram also includes a table for RNAV (L) and RNAV (T) flight paths.

CATEGORY	A	B	C	D
LPV DA	1177- $\frac{3}{4}$	256 (300- $\frac{3}{4}$)		
RNAV/ VNAV DA	1366-1 $\frac{1}{2}$	445 (500-1 $\frac{1}{2}$)		
RNAV MDA	1360-1	439 (500-1)	1360-1 $\frac{1}{4}$	439 (500-1 $\frac{1}{4}$)
C CIRCLING	1380-1 459 (500-1)	1400-1 479 (500-1)	1480-1 $\frac{1}{2}$ 559 (600-1 $\frac{1}{2}$)	1660-2 $\frac{1}{4}$ 739 (800-2 $\frac{1}{4}$)

