

WAAS CH 50407 W18A	APP CRS 180°	Rwy Idg TDZE Apt Elev	5504 800 801
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 18


BOMAR FLD/SHELBYVILLE MUNI (SYI)

⚠

When local altimeter setting not received, use Tullahoma altimeter setting and increase LPV DA to 1123, LNAV/VNAV DA to 1389, all MDA 80 feet, increase LPV all Cats visibility ½ SM, LNAV/VNAV all Cats visibility ¼ SM and LNAV Cat C and D visibility ¼ SM. Baro-VNAV NA when using Tullahoma altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. VDP NA when using Tullahoma altimeter setting.

MISSED APPROACH:
Climb to 3000 direct UCELI and hold.

AWOS-3 119.275	MEMPHIS CENTER 128.15 323.125	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

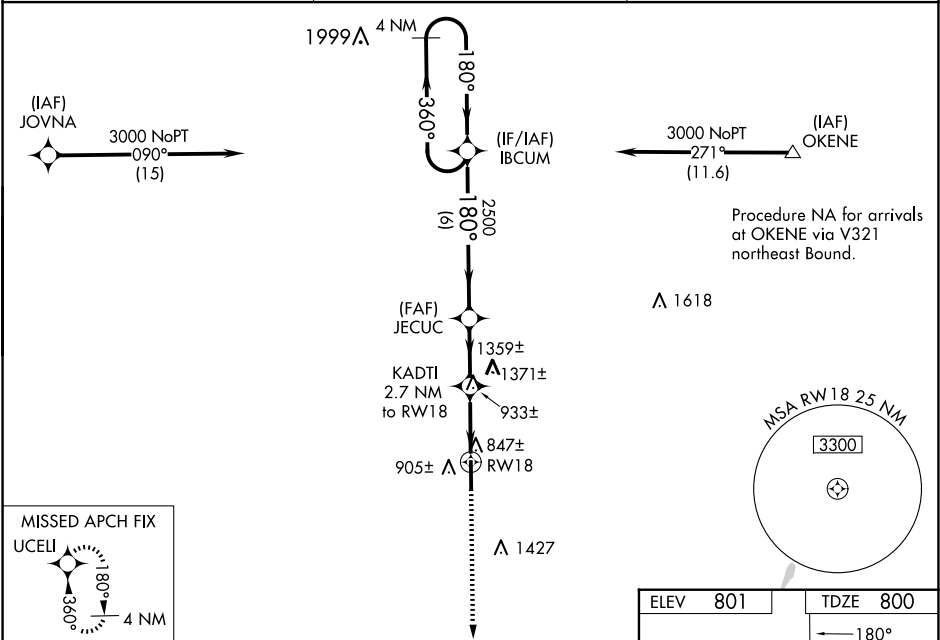

4 NM Holding Pattern		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 26).		3000 UCELI
GP 3.00° TCH 45		*1700		*LNAV only.
6 NM		2.4 NM	1.2 NM	1.5 NM
CATEGORY	A	B	C	D
LPV DA	1050-¾		250 (300-¾)	
LNAV/VNAV DA	1316-1¾		516 (600-1¾)	
LNAV MDA	1280-1	480 (500-1)	1280-1¼	1280-1½
	479 (500-1)	619 (700-1)	480 (500-1¼)	480 (500-1½)
CIRCLING	1280-1	1420-1	1780-3	979 (1000-3)
	479 (500-1)	619 (700-1)		

