

LOC I-DTO <u>109.1</u>	APP CRS 177°	Rwy Idg TDZE Apt Elev	18L 6502 642 643	18R 5003 643 643
----------------------------------	------------------------	-----------------------------	--	--

ILS or LOC RWY 18L
DENTON ENTERPRISE (DTO)

ADF required. RADAR required for procedure entry.


T For inop ALS, increase S-ILS 18L all Cats visibility to $\frac{7}{8}$ SM. For inop ALS, increase S-LOC 18L Cat C/D to $1\frac{3}{8}$ SM.

MALSR



MISSED APPROACH: Climb to 2500 then right turn direct PINCK LOM and hold.

ATIS 119.325	LONE STAR APP CON 118.1 306.95	DENTON TOWER ★ 119.95 (CTAF) 0	GND CON 123.95	CLNC DEL 123.95	UNICOM 122.95
------------------------	--	--	--------------------------	---------------------------	-------------------------

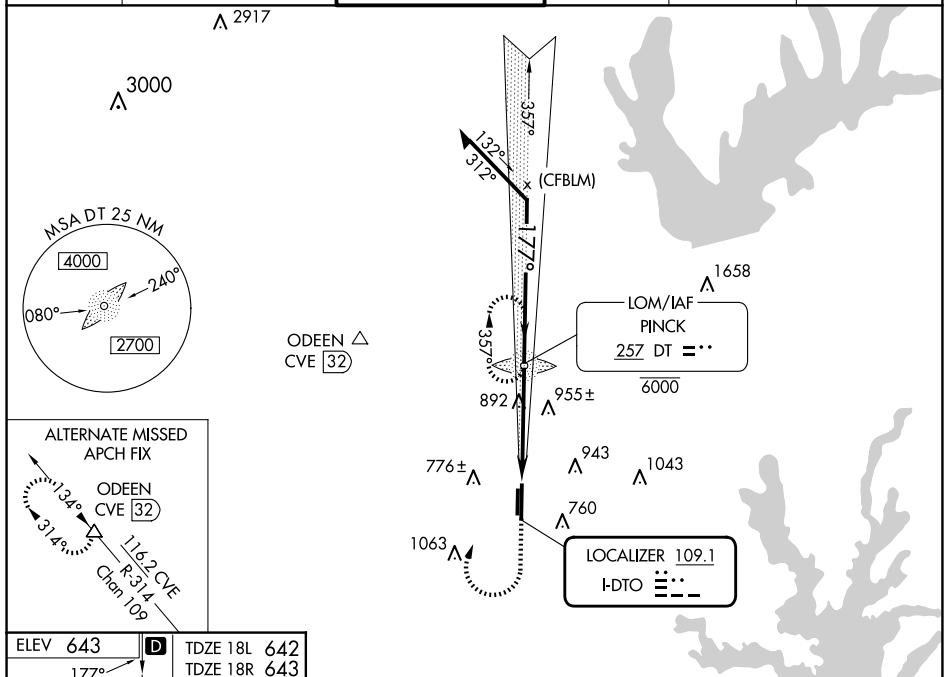

FAF to MAP 4.3 NM

Knots	60	90	120	150	180
Min:Sec	4:18	2:52	2:09	1:43	1:26

