

APP CRS 315°	Rwy Idg 9300 TDZE 581 Apt Elev 607
------------------------	---

RNAV (RNP) Z RWY 31L


DALLAS-FORT WORTH INTL (DFW)

T

For uncompensated Baro-VNAV systems, procedure NA below -4°C (25°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 31R. GPS Required. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 3000 on track 315° to HODAX and on track 306° to KAGLE and hold.

D-ATIS	LONE STAR APP CON		DFW TOWER		GND CON		CLNC DEL		CPDLC
ARR 123.775	118.425	127.075	126.55	127.5	EAST	121.65	121.8	EAST	
DEP 135.925		119.4	124.15	134.9	WEST	121.85		WEST	

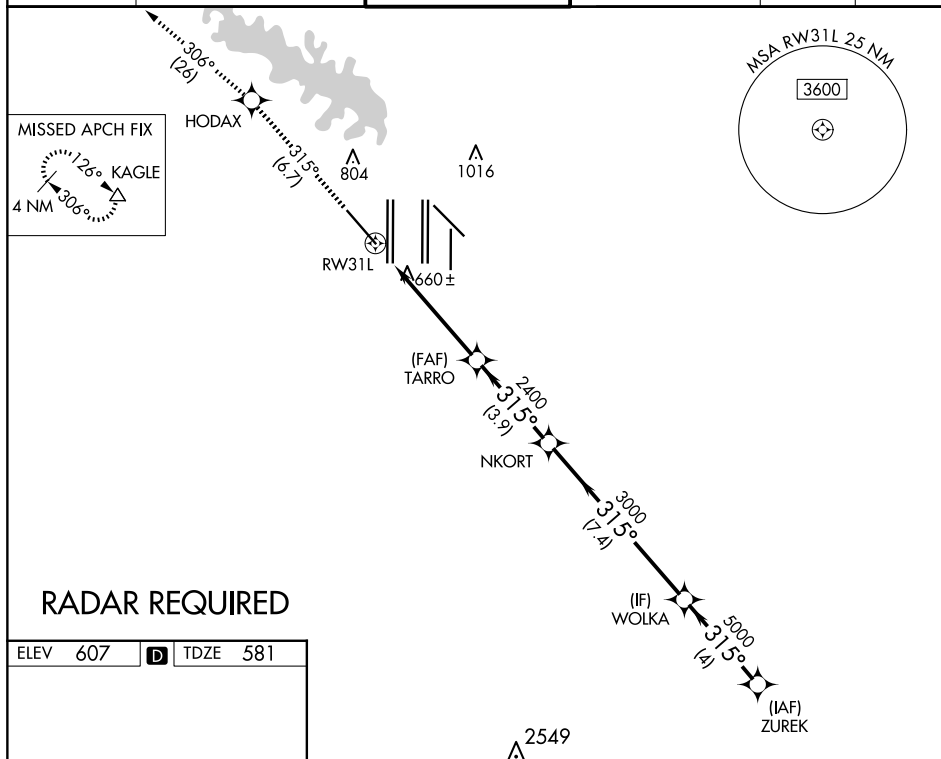

RADAR REQUIRED

3000 ↑ tr 315°	HODAX ✦	KAGLE △	VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.13/TCH 72).			
CATEGORY	A		B		C	D
RNP 0.30 DA			951/60		370 (400-1¼)	
AUTHORIZATION REQUIRED						

DALLAS-FORT WORTH, TEXAS

Amdt 1B 18SEP14

DALLAS-FORT WORTH INTL (DFW)

32°54'N-97°02' W

RNAV (RNP) Z RWY 31L