

APP CRS	Rwy Idg	8373
311°	TDZE	523
	Apt Elev	607

RNAV (RNP) Z RWY 31R
DALLAS-FORT WORTH INTL (DFW)

▼ For uncompensated Baro-VNAV systems, procedure NA below -4°C (25°F) or above 54°C (130°F). For inop MALSR, increase RNP 0.14 all Cats visibility to RVR 5100, RNP 0.23 all Cats visibility to 1½ mile, RNP 0.30 all Cats visibility to 1½ mile. Simultaneous approach authorized with Rwy 31L. GPS Required. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR

MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 direct SOLD and hold.

D-ATIS
ARR **123.775**
DEP **135.925**

LONE STAR APP CON

125 5 125 2

DFW TOWER

126.55 127.5 EAST

124.15 134.9 WEST

GND CON


121.65 121.8 EAST

121.85 WEST

CINC DEF


128 25

CPDLC

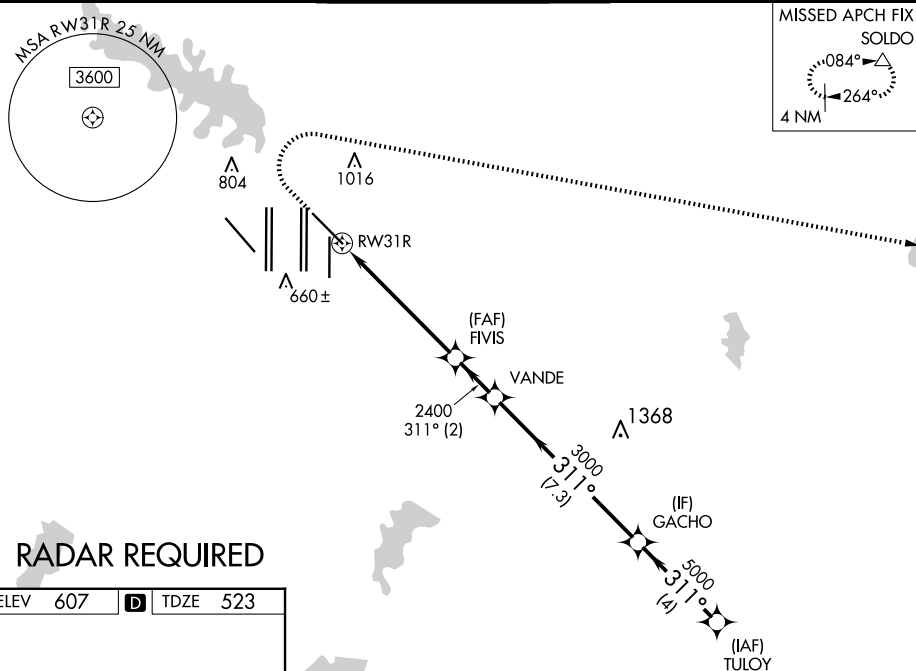


RADAR REQUIRED

ELEV	607	D	TDZE	523
------	-----	----------	------	-----



HIRL all Rwy's
REIL Rwy's 13L and 31L
TDZ/CL all Rwy's except 13L and 31L

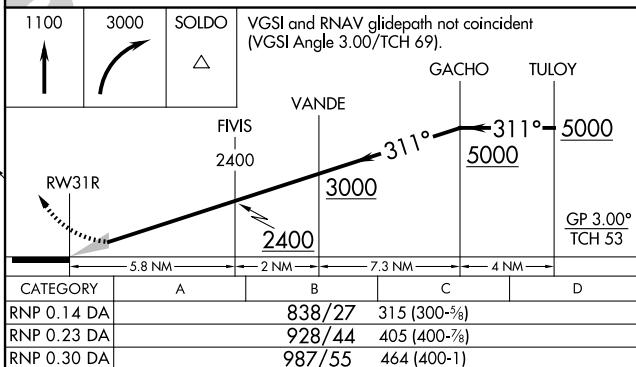

AUTHORIZATION REQUIRED

RNAV (RNP) Z RWY 31R