

WAAS CH 49131 W17A	APP CRS 166°	Rwy Idg 4010 TDZE 1522 Apt Elev 1523
--	------------------------	---



RNAV (GPS) RWY 17
LANGLADE COUNTY (AIG)

RNP APCH - GPS.

⚠ Baro-VNAV NA when using AUV altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Procedure NA at night. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use AUV altimeter setting and increase LPV DA to 1877 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 2029 feet and all visibilities ¼ SM. Increase all MDAs 120 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ½ SM.

MISSED APPROACH:
Climb to 3300 direct
ZABVI and hold.

AWOS-3 119.075	MINNEAPOLIS CENTER 124.4 317.7	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

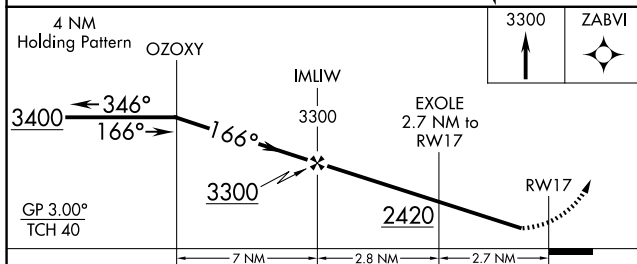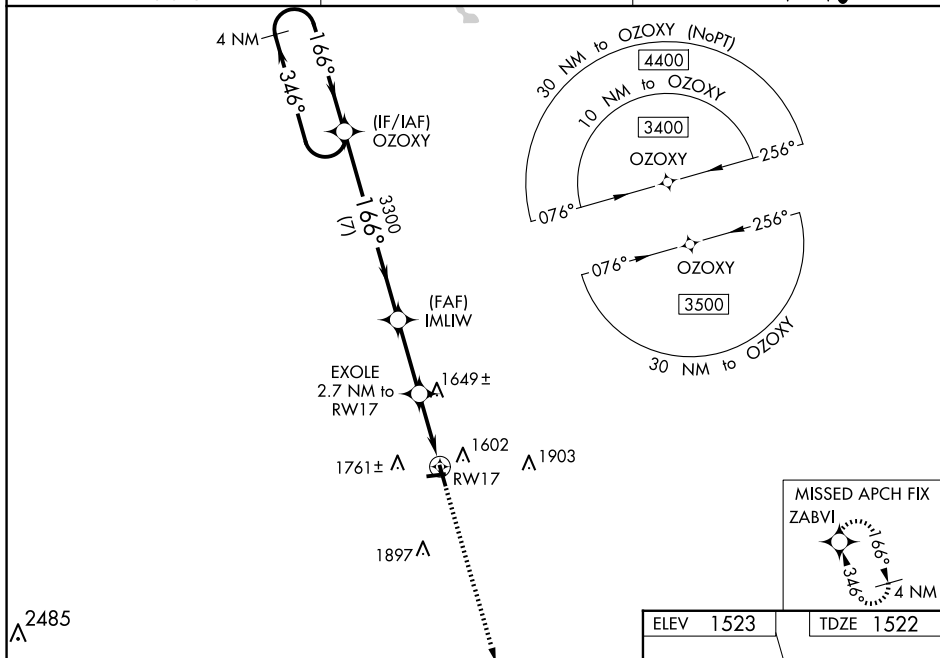

CATEGORY	A	B	C	D
LPV DA	1772-1 250 (300-1)			
LNAV/VNAV DA	1924-1 $\frac{3}{8}$ 402 (400-1 $\frac{3}{8}$)			
LNAV MDA	1920-1 398 (400-1)		1920-1 $\frac{1}{8}$ 398 (400-1 $\frac{1}{8}$)	
CIRCLING	2120-1 597 (600-1)		2260-2 737 (800-2)	2260-2 $\frac{1}{4}$ 737 (800-2 $\frac{1}{4}$)

