

|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>90216</b><br><b>W27A</b> | APP CRS<br><b>274°</b> | Rwy Idg <b>5390</b><br>TDZE <b>552</b><br>Apt Elev <b>569</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

RNAV (GPS) RWY 27


MERKEL FLD SYLACAUGA MUNI (SCD)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 48°C (118°F). Baro-VNAV and VDP NA when using Birmingham altimeter setting.

▲ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Birmingham altimeter setting and increase LPV DA to 889 feet, LNAV/VNAV DA to 1161 feet, and all visibilities ¾ mile. Increase all MDA 100 feet and LNAV Cat C and D visibilities ¼ mile.

MISSED APPROACH:  
Climb to 3200 direct  
GOKYE and hold.

|                            |                                          |                                 |
|----------------------------|------------------------------------------|---------------------------------|
| AWOS-3PT<br><b>119.125</b> | BIRMINGHAM APP CON<br><b>123.8 256.8</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|----------------------------|------------------------------------------|---------------------------------|

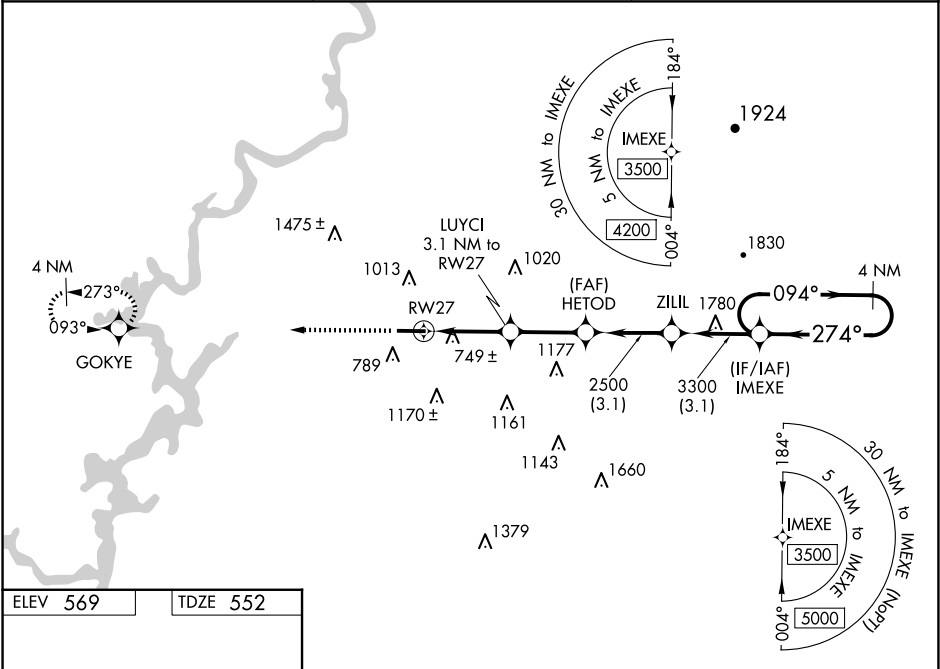

ELEV 569    TDZE 552

☆

274° to RW27

0.4% UP

5390 X 100

27

|              |                      |                                                                  |                      |                      |
|--------------|----------------------|------------------------------------------------------------------|----------------------|----------------------|
| 3200         | GOKYE                | VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 40). |                      | 4 NM Holding Pattern |
| *LNAV only:  |                      | LUYCI 3.1 NM to RW27                                             | HETOD 2500           | ZILIL 3300           |
| RW27         |                      | *1.3 NM to RW27                                                  | *1600                | 2500                 |
| 1.3 NM       |                      | 1.8 NM                                                           | 2.7 NM               | 3.1 NM               |
| CATEGORY     | A                    | B                                                                | C                    | D                    |
| LPV DA       | 802-¾                |                                                                  | 250 (300-¾)          |                      |
| LNAV/VNAV DA | 1074-1¾ 522 (600-1¾) |                                                                  |                      |                      |
| LNAV MDA     | 1000-1 448 (500-1)   |                                                                  | 1000-1¾ 448 (500-1¾) |                      |
| CIRCLING     | 1140-1 571 (600-1)   | 1400-1¼ 831 (900-1¼)                                             | 1620-3 1051 (1100-3) | 1700-3 1131 (1200-3) |