

24361


COPTER RNAV (GPS) 291°

A NA Limit final and missed approach to 70 KIAS. When local altimeter setting not received, use Indianapolis Intl altimeter setting and increase MDA 40 feet. Activate High Intensity Pad Lights-CTAF.

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct VHP VORTAC and hold.

AWOS-3
135,525




INDIANAPOLIS APP CON
125,275 317.8

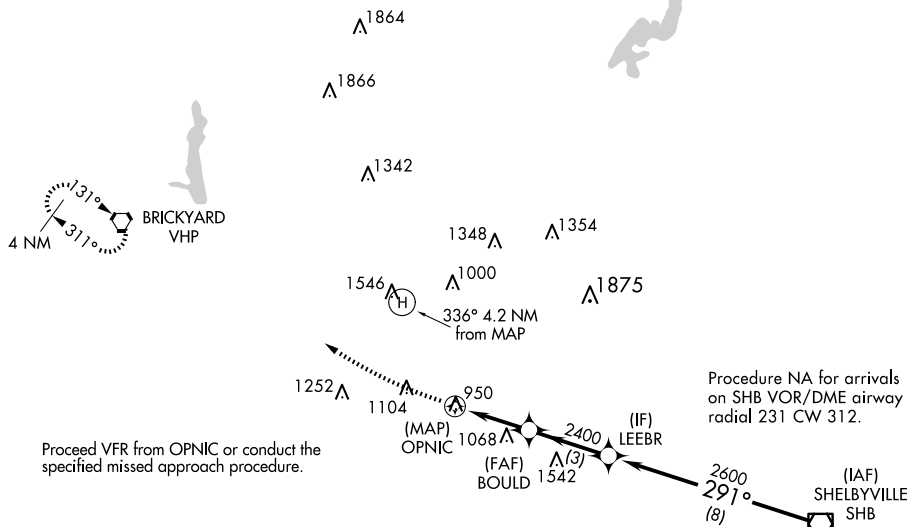UNICOM
123.05 (CTAF) **L**

Proceed VFR from OPNIC or conduct the specified missed approach procedure.

Procedure NA for arrivals
on SHB VOR/DME airway
radial 231 CW 312.

CAUTION: Heliport located in area of numerous lighted and unlighted obstructions.

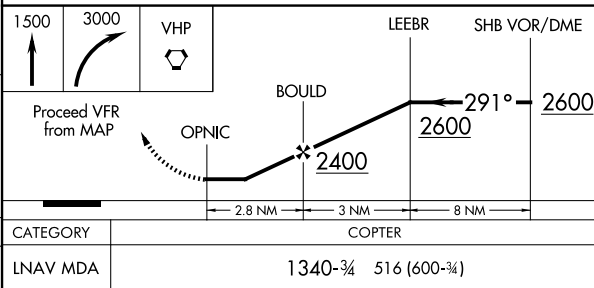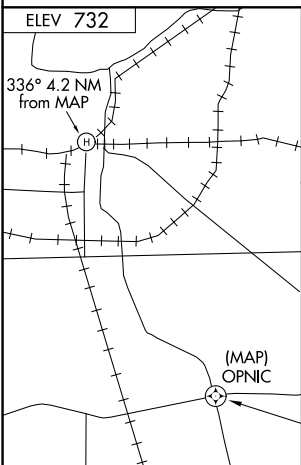

INDIANAPOLIS, INDIANA
Orig-B 11AUG22

39°46'N-86°09'W

INDIANAPOLIS DOWNTOWN (8A4)
COPTER RNAV (GPS) 291°