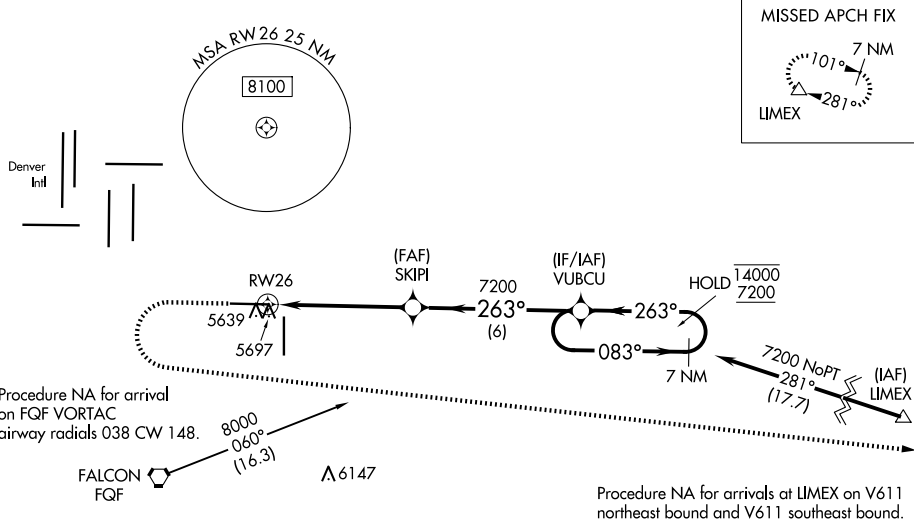
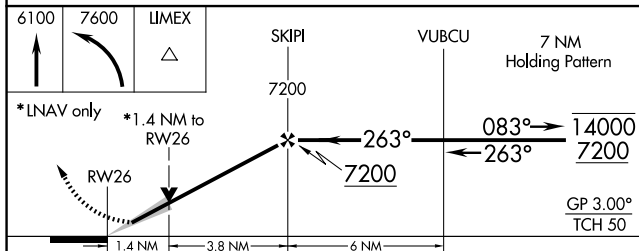


23334


RNAV (GPS) RWY 26
COLORADO AIR AND SPACE PORT (CFO)

MISSED APPROACH: (Do not exceed 200K until LIMEX) Climb to 6100 then climbing left turn to 7600 direct LIMEX and hold.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below
A -25°C or above 48°C. For inop ALS, increase LNAV/VNAV all Cats
visibility to 1½ SM, and increase LNAV Cat C/D visibility to 1¾ SM.

UNICOM
122.95 $\Delta 6270 \pm$ 

CATEGORY	A	B	C	D
LPV DA	5689-1/2 200 (200-1/2)			
LNAV/VNAV DA	5858-3/4 369 (400-3/4)			
LNAV MDA	5960-1/2 471 (500-1/2)		5960-1 471 (500-1)	
C CIRCLING	6000-1 485 (500-1)		6100-1 1/2 585 (600-1 1/2)	6300-2 1/2 785 (800-2 1/2)

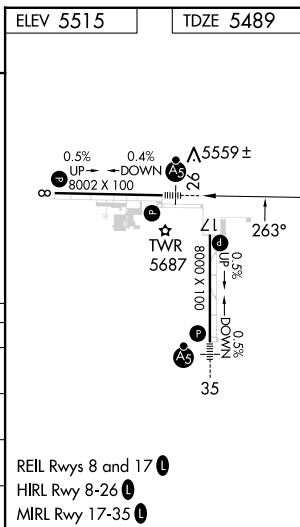

COLORADO AIR AND SPACE PORT (CFO)
RNAV (GPS) RWY 26