

WAAS
CH **77842**
W28A

APP CRS
281°

Rwy Idg
TDZE **732**
Apt Elev **732**

RNAV (GPS) RWY 28

BRECKINRIDGE COUNTY (I93)

RNP APCH.


▼

NA

Baro-VNAV NA. Use Fort Knox altimeter setting, when not received, use Elizabethtown altimeter setting and increase LPV DA to 1047, LNAV/VNAV DA to 1185 and all MDA 20 feet.

MISSED APPROACH: Climb to 4000 direct RICKZ and hold, continue climb-in-hold to 4000.

AWOS-3PT 123.625	KFTK ATIS ★ 109.6	LOUISVILLE APP CON 132.075 327.0	CTAF 122.9 0
----------------------------	-----------------------------	--	------------------------

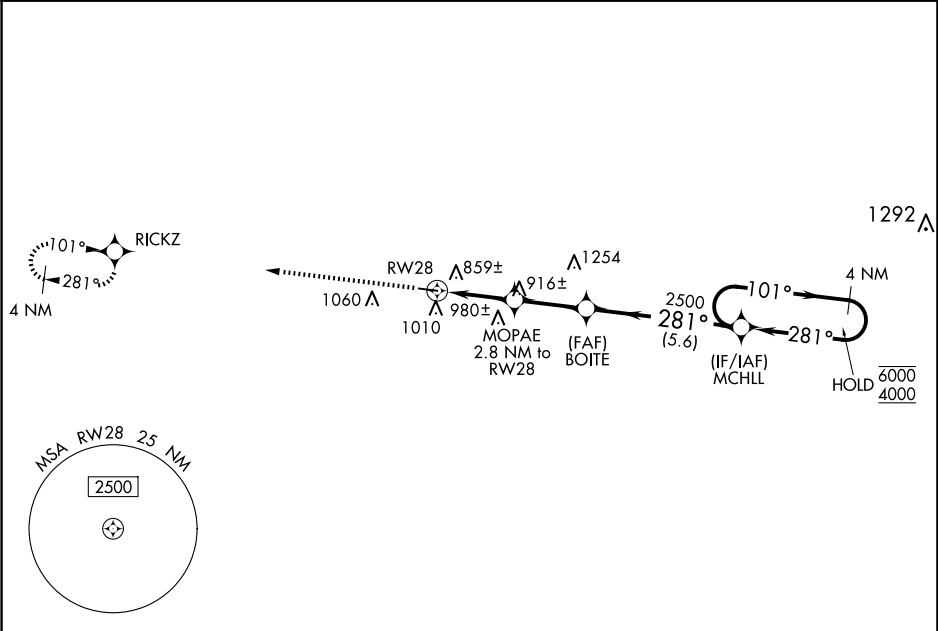

ELEV 732

TDZE 732

4000

RICKZ

*LNAV only.

RW28

MOPAE
2.8 NM to
RW28

BOITE

MCHLL

101°

281°

281°

4000 X 75

0.4% UP

281°

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 27).

4 NM Holding Pattern

101°

281°

281°

GP 3.00°

TCH 50

2.8 NM

2.6 NM

5.6 NM

CATEGORY	A	B	C	D
LPV DA	1040-1		308 (400-1)	
LNAV/ VNAV DA	1178-1 ³ / ₈		446 (500-1 ³ / ₈)	
LNAV MDA	1180-1	448 (500-1)	1180-1 ³ / ₈	448 (500-1 ³ / ₈)
CIRCLING	1380-1 648 (700-1)	1480-1 748 (800-1)	1480-2 ¹ / ₄ 748 (800-2 ¹ / ₄)	1480-2 ¹ / ₂ 748 (800-2 ¹ / ₂)

MIRL Rwy 10-28

REIL Rwy 10 and 28