
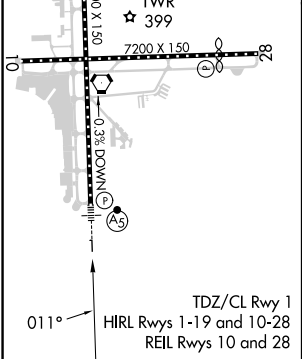



GPS required. For uncompensated Baro-VNAV systems, procedure N/A below -15°C (3°F) or above 47°C (117°F). For inoperative MALSR, increase RNP 0.15 visibility to 1½ and RNP 0.30 visibility to 1½.

MALSR

MISSED APPROACH: Climb to 3000 on track 011° to OXFIC and on track 357° to OTOLE and hold.

D-ATIS	ALBANY APP CON	ALBANY TOWER	GND CON	CLNC DEL
120.45	132.825 307.2	119.5 257.8	121.7 348.6	127.50

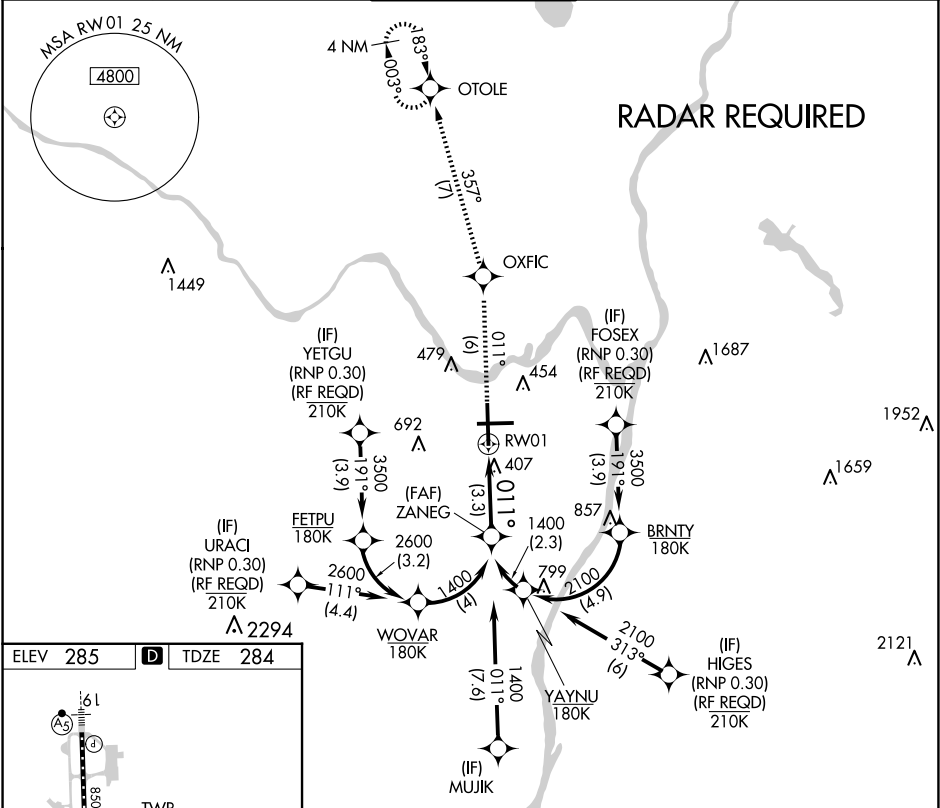

3000	OXFIC	OTOLE	ZANEG	
	tr 011°		tr 357°	
See planview for multiple IF locations.				
				
CATEGORY	A	B	C	D
RNP 0.15 DA	656/40 372 (400-¾)			
RNP 0.30 DA	727/50 443 (500-1)			
AUTHORIZATION REQUIRED				