

WAAS CH 61007 W31A	APP CRS 315°	Rwy Idg 5099 TDZE 1423 Apt Elev 1425
--	------------------------	---

RNAV (GPS) RWY 31

ALEXANDRIA RGNL/CHANDLER FLD (AXN)

⚠ Inoperative table does not apply to LPV & LNAV/VNAV Cats A/B/C and LNAV Cat C. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP -0.3 NA. VDP and Baro-VNAV NA when using Glenwood altimeter setting. When local altimeter setting not received, use Glenwood altimeter setting and increase all DAs/MDAs 40 feet and increase LPV and LNAV/VNAV visibilities ¼ mile all Cats.


ODALS




MISSED APPROACH: Climb to 3500 direct
OCIWE and via 352° track to TILER and
hold.

ASOS 118.375	MINNEAPOLIS CENTER 126.1 269.2	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

MISSED APCH FIX

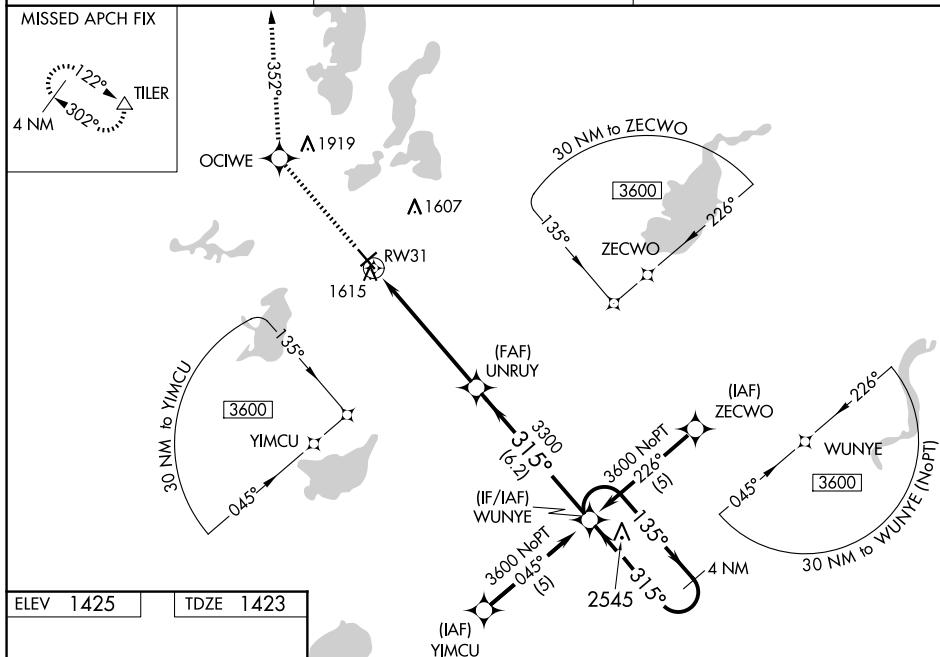

ELEV 1425		TDZE 1423
-----------	--	-----------

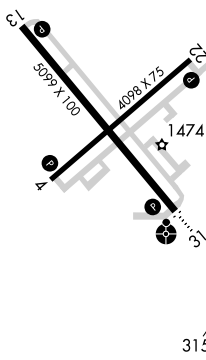

REIL Rwys 4, 13, and 22 **L**
MIRL Rwys 4-22 and 13-31 **L**

3500 ↑	OCIWE ✦	tr 352°	TILER △	WUNYE 4 NM Holding Pattern
*LNAV only.				
CATEGORY	A	B	C	D
LPV DA	1815-1¼		392 (400-1¼)	
LNAV/VNAV DA	1885-1½		462 (500-1½)	
LNAV MDA	1880-¾	457 (500-¾)	1880-1¼ 457 (500-1¼)	1880-1½ 457 (500-1½)
CIRCLING	1920-1	495 (500-1)	1940-1½ 515 (600-1½)	2000-2 575 (600-2)