

LOC/DME I-BRU
108.7
Chan **24**

APP CRS
275°

Rwy Ldg
9999

26L
8500

26R
990

TDZE
996

Apt Elev
1026 1026

ILS or LOC RWY 26L

HARTSFIELD/JACKSON ATLANTA INTL (ATL)

RADAR required.


▼ Inop table does not apply to sidestep Rwy 26R Cats A and B. For inop ALS, increase S-ILS 26L all Cats visibility to RVR 4500 and S-LOC 26L Cat E visibility to RVR 6000. For inop ALS to Rwy 26R, increase sidestep 26R Cat E visibility to 2 SM. Simultaneous approach authorized.

Rwy 26L
MALSR

Rwy 26R
MALSR

MISSED APPROACH: Climb to 1500 then climbing right turn to 4000 on heading 290° and RMG R-132 to DALAS INT/RMG VORTAC 18.5 DME and hold.

D-ATIS	ATLANTA	ATLANTA TOWER				ALL	GND CON		ALL
ARR 119.65	APP CON	8L-26R	8R-26L	9L-27R	9R-27L	10-28	RWYS	8L-26R, 8R-26L	9L-27R, 9R-27L
DEP 125.55	127.9 379.9	119.1	125.325	123.85	119.3	119.5	254.4	121.9	121.75 121.65 254.4

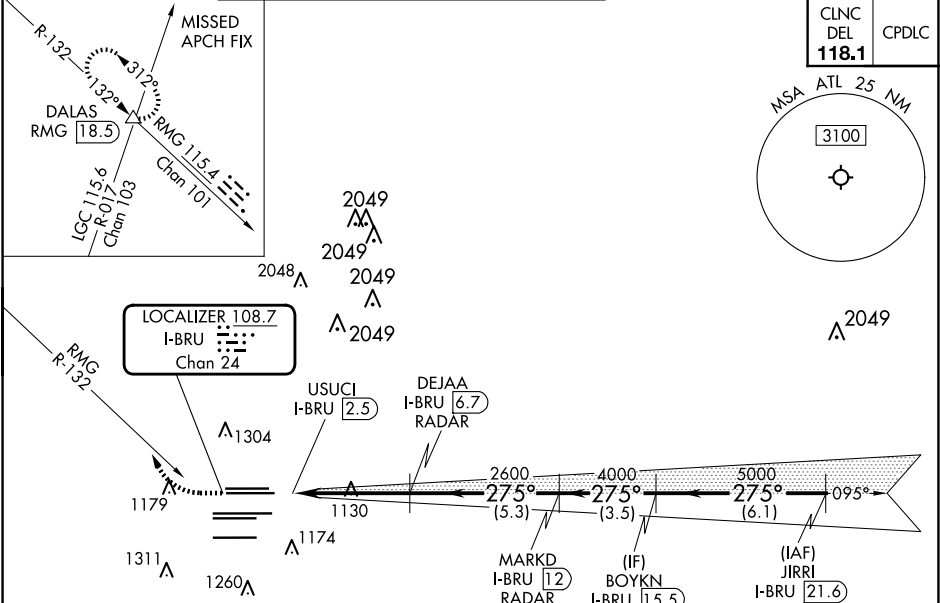

ELEV 1026	D	TDZE 26L 996	TDZE 26R 990
-----------	----------	--------------	--------------

