

WAAS CH 62911 W30A	APP CRS 303°	Rwy Idg 10201 TDZE 1380 Apt Elev 1384
--	------------------------	--

RNAV (GPS) Y RWY 30C

MESA GATEWAY (IWA)


▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C (29°F) or above 35°C (95°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Phoenix Sky Harbor Intl altimeter setting and increase LPV DA to 1660 feet, LNAV/VNAV DA to 1710 feet and all MDA 80 feet; increase LPV all Cats visibility ⅓ SM, increase LNAV/VNAV all Cats, LNAV Cats C, D and E, and Circling Cats D, E visibility ¼ SM. VDP and Baro-VNAV NA with Phoenix Sky Harbor Intl altimeter setting.

MISSED APPROACH:
Climb to 2800 then climbing left turn to 5000 direct GICGE and hold.

ATIS 133.5 270.275	PHOENIX APP CON 124.9 353.8	GATEWAY TOWER ★ 120.6 (CTAF) 289.4	GND CON 128.25 275.8	CLNC DEL 135.05
------------------------------	---------------------------------------	--	--------------------------------	---------------------------

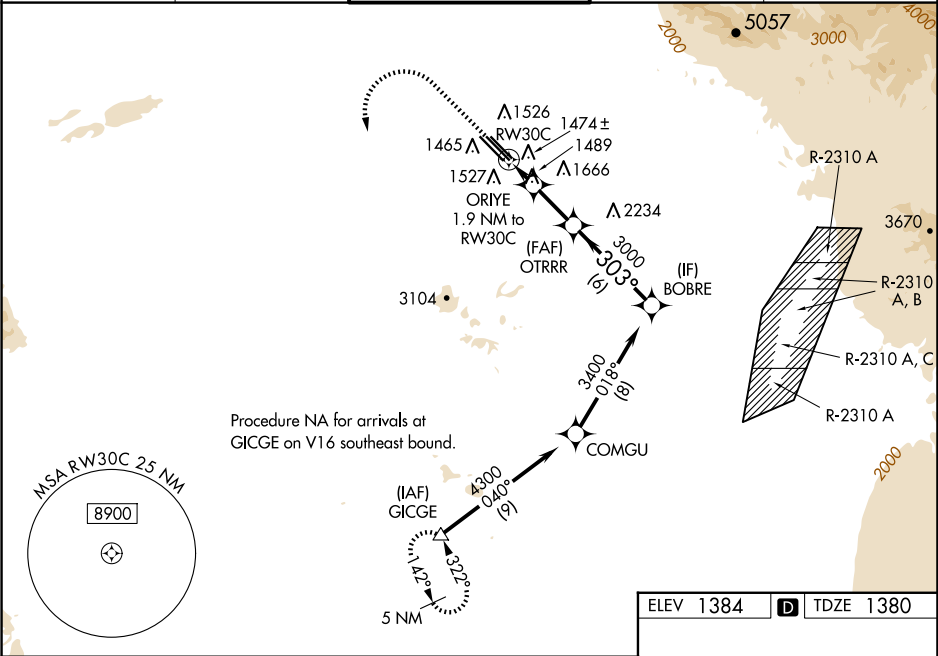

2800

↑

5000

↖

GICGE

△

VGSI and RNAV glidepath not coincident

(VGSI Angle 3.00/TCH 49).

BOBRE

3400

GP 3.00°

TCH 42

*LNAV only.

ORIYE

1.9 NM to RW30C

OTRRR

3000

303°

3000

2020*

*1.2 NM to RW30C

RW30C

1.2 NM

0.7

3.1 NM

6 NM

CATEGORY	A	B	C	D	E
LPV DA		1580-¾ 200 (200-¾)			
LNAV/VNAV DA		1630-⅞ 250 (300-⅞)			
LNAV MDA	1800-1	420 (500-1)	1800-1⅛ 420 (500-1⅛)		
CIRCLING	1880-1	496 (500-1)	1880-1½ 496 (500-1½)	2000-2 616 (700-2)	2040-2¼ 656 (700-2¼)

