

## KILNS FIVE DEPARTURE (RNAV)


CHARLOTTE DEP CON  
124.0 307.8  
D-ATIS DEP 132.1  
CLINC DEL  
127.15 348.6  
CPDLC  
GND CON  
121.8 348.6 (WEST)  
121.9 348.6 (EAST)  
CHARLOTTE TOWER  
118.1 257.8 (Rwy 18)  
126.4 257.8 (Rwy 18C)  
133.35 257.8 (Rwy 18B)

## TAKEOFF MINIMUMS


Rwys 18L/C/R, 36C/R: Standard with minimum climb of 500' per NM to 1260.

Rwy 36L: Standard with minimum climb of 500' per NM to 1400.

**TOP ALTITUDE:**  
**8000**

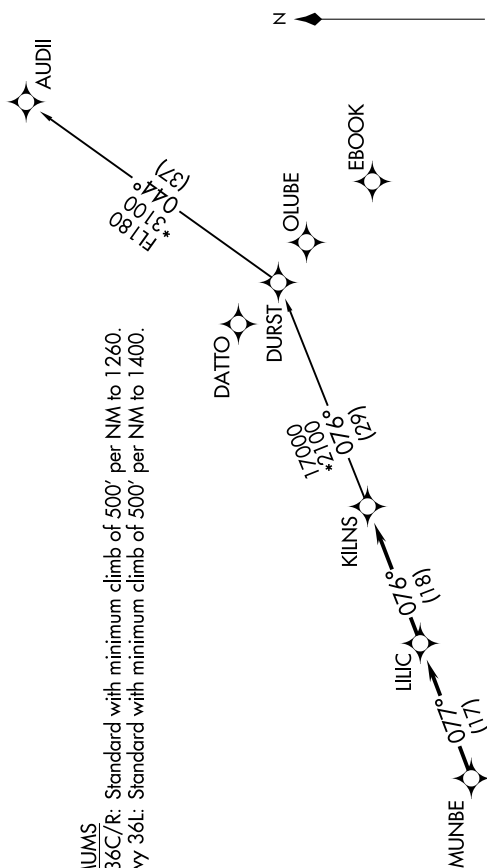

NOTE: For turbojets only.  
NOTE: Transponder code will be issued via PDC or Charlotte CLNC DEL  
NOTE: Accelerate to 250K, if unable advise ATC. Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.  
NOTE: If unable to accept climb rates, advise ATC on initial contact.

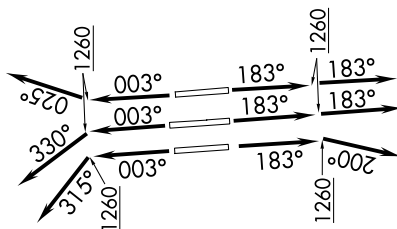

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

SE-2, 17 APR 2025 to 15 MAY 2025

## KILNS FIVE DEPARTURE (RNAV)

(KILNS5.KILNS) 21MAR24

CHARLOTTE, NORTH CAROLINA

CHARLOTTE/DOUGLAS INTL (CLT)