

APP CRS	Rwy Idg	10000
003°	TDZE	707
	Apt Elev	748

RNAV (RNP) Z RWY 36C
CHARLOTTE/DOUGLAS INTL (CLT)

RNP AR APCH - GPS.




Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -8°C or above 54°C. For inop ALS, increase RNP 0.30 visibility all Cats to 1½ SM.




MISSED APPROACH: Climb to 3000 on track 003° to TOMME and hold.

D-ATIS	CHARLOTTE APP CON	CHARLOTTE TOWER	GND CON	CLNC DEL
ARR 121.15 DEP 132.1	(001°-119°) 128.32 (120°-295°) 120.05 (296°-360°) 134.75 (180°-359°) 257.2 (360°-179°) 307.8	(Rwys 18L-36R) 118.1 257.8 (Rwy 18C-36C) 126.4 257.8 (Rwy 18R-36L) 133.35 257.8	121.8 348.6 (WEST) 121.9 348.6 (EAST)	127.15 348.6

1847

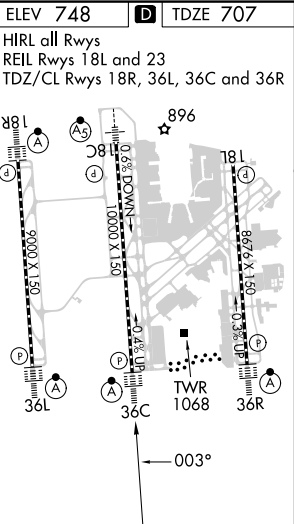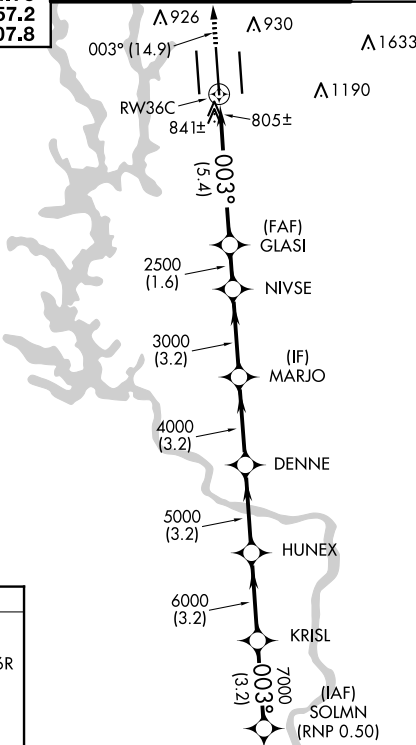

3000 	tr 003°	TOMME 	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).					SOLMN
		GLASI	NIVSE	MARJO	DENNE	HUNEX	KRISL	SOLMN
		2500	3000	4000	5000	6000	7000	8000
		5.4 NM	1.6 NM	3.2 NM	3.2 NM	3.2 NM	3.2 NM	3.2 NM
CATEGORY		A		B		C		D
RNP 0.11 DA				1134/40		427 (400-¾)		
RNP 0.30 DA				1180/50		473 (500-1)		
AUTHORIZATION REQUIRED								

SE-2, 17 APR 2025 to 15 MAY 2025

SE-2, 17 APR 2025 to 15 MAY 2025